



website:<http://biz.LGservice.com>
e-mail:<http://www.LGService.com/techsup.html>

LCD TV


SERVICE MANUAL

CHASSIS : ML-041A

MODEL RT-26LZ30/RM-26LZ30

CAUTION

BEFORE SERVICING THE CHASSIS,
READ THE SAFETY PRECAUTIONS IN THIS MANUAL.

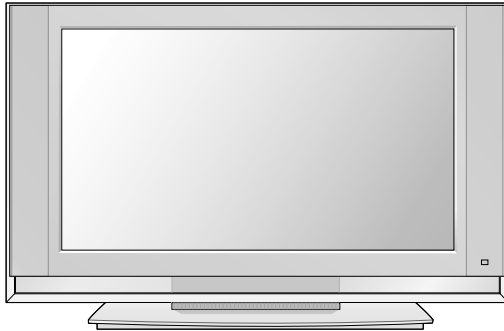

CONTENTS

CONTENTS	2
PRODUCT SAFETY	3
SPECIFICATION	4
TIMING CHART	10
ADJUSTMENT INSTRUCTION.....	11
TROUBLE SHOOTING	16
BLOCK DIAGRAM.....	21
WIRING DIAGRAM.....	23
EXPLODED VIEW	24
EXPLODED VIEW PARTS LIST	25
REPLACEMENT PARTS LIST	26
SVC. SHEET	

SAFETY PRECAUTIONS

IMPORTANT SAFETY NOTICE

Many electrical and mechanical parts in this chassis have special safety-related characteristics. These parts are identified by \triangle in the Schematic Diagram and Replacement Parts List.

It is essential that these special safety parts should be replaced with the same components as recommended in this manual to prevent X-RADIATION, Shock, Fire, or other Hazards.

Do not modify the original design without permission of manufacturer.

General Guidance

An **isolation Transformer should always be used** during the servicing of a receiver whose chassis is not isolated from the AC power line. Use a transformer of adequate power rating as this protects the technician from accidents resulting in personal injury from electrical shocks.

It will also protect the receiver and its components from being damaged by accidental shorts of the circuitry that may be inadvertently introduced during the service operation.

If any fuse (or Fusible Resistor) in this TV receiver is blown, replace it with the specified.

When replacing a high wattage resistor (Oxide Metal Film Resistor, over 1W), keep the resistor 10mm away from PCB.

Keep wires away from high voltage or high temperature parts.

X-RAY Radiation

Warning:

The source of X-RAY RADIATION in this TV receiver is the High Voltage Section and the LCD PANEL.
For continued X-RAY RADIATION protection, the replacement panel must be the same type panel as specified in the Replacement Parts List.

To determine the presence of high voltage, use an accurate high impedance HV meter.

Adjust brightness, color, contrast controls to minimum.

Measure the high voltage.

The meter reading should indicate

23.5 ; 1.5KV: 14-19 inch, 26 ; 1.5KV: 19-21 inch,

29.0 ; 1.5KV: 25-29 inch, 30.0 ; 1.5KV: 32 inch

If the meter indication is out of tolerance, immediate service and correction is required to prevent the possibility of premature component failure.

Before returning the receiver to the customer,

always perform an **AC leakage current check** on the exposed metallic parts of the cabinet, such as antennas, terminals, etc., to be sure the set is safe to operate without damage of electrical shock.

Leakage Current Cold Check(Antenna Cold Check)

With the instrument AC plug removed from AC source, connect an electrical jumper across the two AC plug prongs. Place the AC switch in the on position, connect one lead of ohm-meter to the AC plug prongs tied together and touch other ohm-meter lead in turn to each exposed metallic parts such as antenna terminals, phone jacks, etc.

If the exposed metallic part has a return path to the chassis, the measured resistance should be between 1M Ω and 5.2M Ω .

When the exposed metal has no return path to the chassis the reading must be infinite.

Any other abnormality exists that must be corrected before the receiver is returned to the customer.

Leakage Current Hot Check (See below Figure)

Plug the AC cord directly into the AC outlet.

Do not use a line Isolation Transformer during this check.


Connect 1.5K/10watt resistor in parallel with a 0.15uF capacitor between a known good earth ground (Water Pipe, Conduit, etc.) and the exposed metallic parts.

Measure the AC voltage across the resistor using AC voltmeter with 1000 ohms/volt or more sensitivity.

Reverse plug the AC cord into the AC outlet and repeat AC voltage measurements for each exposed metallic part. Any voltage measured must not exceed 0.75 volt RMS which corresponds to 0.5mA.

In case any measurement is out of the limits specified, there is possibility of shock hazard and the set must be checked and repaired before it is returned to the customer.

Leakage Current Hot Check circuit

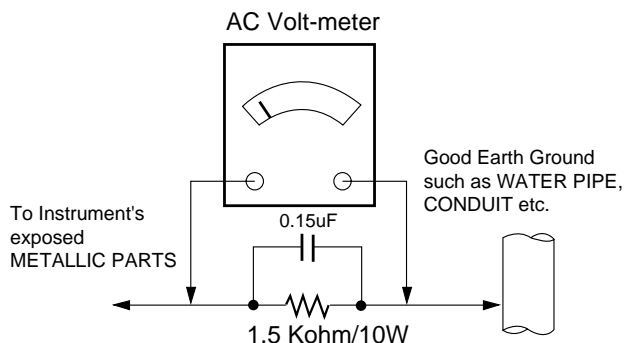

SERVICING PRECAUTIONS

CAUTION: Before servicing receivers covered by this service manual and its supplements and addenda, read and follow the **SAFETY PRECAUTIONS** on page 3 of this publication.

NOTE: If unforeseen circumstances create conflict between the following servicing precautions and any of the safety precautions on page 3 of this publication, always follow the safety precautions. Remember: Safety First.

General Servicing Precautions

1. Always unplug the receiver AC power cord from the AC power source before;
 - a. Removing or reinstalling any component, circuit board module or any other receiver assembly.
 - b. Disconnecting or reconnecting any receiver electrical plug or other electrical connection.
 - c. Connecting a test substitute in parallel with an electrolytic capacitor in the receiver.**CAUTION:** A wrong part substitution or incorrect polarity installation of electrolytic capacitors may result in an explosion hazard.

2. Test high voltage only by measuring it with an appropriate high voltage meter or other voltage measuring device (DVM, FETVOM, etc) equipped with a suitable high voltage probe. Do not test high voltage by "drawing an arc".
3. Do not spray chemicals on or near this receiver or any of its assemblies.
4. Unless specified otherwise in this service manual, clean electrical contacts only by applying the following mixture to the contacts with a pipe cleaner, cotton-tipped stick or comparable non-abrasive applicator; 10% (by volume) Acetone and 90% (by volume) isopropyl alcohol (90%-99% strength)
CAUTION: This is a flammable mixture.
Unless specified otherwise in this service manual, lubrication of contacts is not required.
5. Do not defeat any plug/socket B+ voltage interlocks with which receivers covered by this service manual might be equipped.
6. Do not apply AC power to this instrument and/or any of its electrical assemblies unless all solid-state device heat sinks are correctly installed.
7. Always connect the test receiver ground lead to the receiver chassis ground before connecting the test receiver positive lead.
Always remove the test receiver ground lead last.
8. *Use with this receiver only the test fixtures specified in this service manual.*
CAUTION: Do not connect the test fixture ground strap to any heat sink in this receiver.

Electrostatically Sensitive (ES) Devices

Some semiconductor (solid-state) devices can be damaged easily by static electricity. Such components commonly are called *Electrostatically Sensitive (ES) Devices*. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by static by static electricity.

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any electrostatic charge on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging wrist strap device, which should be removed to prevent potential shock reasons prior to applying power to the unit under test.

2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static type solder removal device. Some solder removal devices not classified as "anti-static" can generate electrical charges sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.
CAUTION: Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.
8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity sufficient to damage an ES device.)

General Soldering Guidelines

1. Use a grounded-tip, low-wattage soldering iron and appropriate tip size and shape that will maintain tip temperature within the range or 500 °F to 600 °F.
2. Use an appropriate gauge of RMA resin-core solder composed of 60 parts tin/40 parts lead.
3. Keep the soldering iron tip clean and well tinned.
4. Thoroughly clean the surfaces to be soldered. Use a mall wire-bristle (0.5 inch, or 1.25cm) brush with a metal handle. Do not use freon-propelled spray-on cleaners.
5. Use the following unsoldering technique
 - a. Allow the soldering iron tip to reach normal temperature. (500 °F to 600 °F)
 - b. Heat the component lead until the solder melts.
 - c. Quickly draw the melted solder with an anti-static, suction-type solder removal device or with solder braid.
CAUTION: Work quickly to avoid overheating the circuitboard printed foil.
6. Use the following soldering technique.
 - a. Allow the soldering iron tip to reach a normal temperature (500 °F to 600 °F)
 - b. First, hold the soldering iron tip and solder the strand against the component lead until the solder melts.
 - c. Quickly move the soldering iron tip to the junction of the component lead and the printed circuit foil, and hold it there only until the solder flows onto and around both the component lead and the foil.
CAUTION: Work quickly to avoid overheating the circuit board printed foil.
 - d. Closely inspect the solder area and remove any excess or splashed solder with a small wire-bristle brush.

IC Remove/Replacement

Some chassis circuit boards have slotted holes (oblong) through which the IC leads are inserted and then bent flat against the circuit foil. When holes are the slotted type, the following technique should be used to remove and replace the IC. When working with boards using the familiar round hole, use the standard technique as outlined in paragraphs 5 and 6 above.

Removal

1. Desolder and straighten each IC lead in one operation by gently prying up on the lead with the soldering iron tip as the solder melts.
2. Draw away the melted solder with an anti-static suction-type solder removal device (or with solder braid) before removing the IC.

Replacement

1. Carefully insert the replacement IC in the circuit board.
2. Carefully bend each IC lead against the circuit foil pad and solder it.
3. Clean the soldered areas with a small wire-bristle brush. (It is not necessary to reapply acrylic coating to the areas).

"Small-Signal" Discrete Transistor

Removal/Replacement

1. Remove the defective transistor by clipping its leads as close as possible to the component body.
2. Bend into a "U" shape the end of each of three leads remaining on the circuit board.
3. Bend into a "U" shape the replacement transistor leads.
4. Connect the replacement transistor leads to the corresponding leads extending from the circuit board and crimp the "U" with long nose pliers to insure metal to metal contact then solder each connection.

Power Output, Transistor Device

Removal/Replacement

1. Heat and remove all solder from around the transistor leads.
2. Remove the heat sink mounting screw (if so equipped).
3. Carefully remove the transistor from the heat sink of the circuit board.
4. Insert new transistor in the circuit board.
5. Solder each transistor lead, and clip off excess lead.
6. Replace heat sink.

Diode Removal/Replacement

1. Remove defective diode by clipping its leads as close as possible to diode body.
2. Bend the two remaining leads perpendicular y to the circuit board.
3. Observing diode polarity, wrap each lead of the new diode around the corresponding lead on the circuit board.
4. Securely crimp each connection and solder it.
5. Inspect (on the circuit board copper side) the solder joints of the two "original" leads. If they are not shiny, reheat them and if necessary, apply additional solder.

Fuse and Conventional Resistor

Removal/Replacement

1. Clip each fuse or resistor lead at top of the circuit board hollow stake.
2. Securely crimp the leads of replacement component around notch at stake top.
3. Solder the connections.

CAUTION: Maintain original spacing between the replaced component and adjacent components and the circuit board to prevent excessive component temperatures.

Circuit Board Foil Repair

Excessive heat applied to the copper foil of any printed circuit board will weaken the adhesive that bonds the foil to the circuit board causing the foil to separate from or "lift-off" the board. The following guidelines and procedures should be followed whenever this condition is encountered.

At IC Connections

To repair a defective copper pattern at IC connections use the following procedure to install a jumper wire on the copper pattern side of the circuit board. (Use this technique only on IC connections).

1. Carefully remove the damaged copper pattern with a sharp knife. (Remove only as much copper as absolutely necessary).
2. Carefully scratch away the solder resist and acrylic coating (if used) from the end of the remaining copper pattern.
3. Bend a small "U" in one end of a small gauge jumper wire and carefully crimp it around the IC pin. Solder the IC connection.
4. Route the jumper wire along the path of the out-away copper pattern and let it overlap the previously scraped end of the good copper pattern. Solder the overlapped area and clip off any excess jumper wire.

At Other Connections

Use the following technique to repair the defective copper pattern at connections other than IC Pins. This technique involves the installation of a jumper wire on the component side of the circuit board.

1. Remove the defective copper pattern with a sharp knife. Remove at least 1/4 inch of copper, to ensure that a hazardous condition will not exist if the jumper wire opens.
2. Trace along the copper pattern from both sides of the pattern break and locate the nearest component that is directly connected to the affected copper pattern.
3. Connect insulated 20-gauge jumper wire from the lead of the nearest component on one side of the pattern break to the lead of the nearest component on the other side. Carefully crimp and solder the connections.

CAUTION: Be sure the insulated jumper wire is dressed so the it does not touch components or sharp edges.

SPECIFICATION

NOTE : Specifications and others are subject to change without notice for improvement.

1. Application range

This specification is applied to ML-041A chassis.

2. Requirement for Test

Testing for standard of each part must be followed in below condition.

- (1) Temperature: 25°C ± 5°C
- (2) Humidity: 65% ± 10%
- (3) Power: Standard input voltage (AC 100-240V, 50/60Hz)
- (4) Measurement must be performed after heat-run more than 15min.
- (5) Adjusting standard for this chassis is followed a special standard.

4.General Specification(TV)

No.	Item	Specification	Remark
1	Video input applicable system	1)PAL-D/K,B/G,I 2)NTSC-M 3)SECAM NTSC 4.43'	
2	Receivable broadcasting system	1)PAL/SECAM BG 2)PAL/SECAM DK 3)PAL I/I 4)SECAM L/L' 5)NTSC M 6)PAL-N/M 7)NTSC M	EU/Non-EU(RZ/RT) (PAL Market) 7)NTSC Area(RM)
3	RF input channel	VHF : E2 ~ E12 UHF : E21 ~ E69 CATV : S1 ~ S20 HYPER : S21 ~ S41 L/L' : B,C,D VHF : 2 ~ 13 UHF : 14 ~ 69 CATV : 1 ~ 125 VHF Low : 1~M10 VHF High : 4~S22 UHF : S23~62	PAL FRANCE NTSC JAPAN
4	Input voltage	AC 100 - 240V/ 50Hz,60HZ	
5	Picture size	660.40 mm	26"
6	Tuning system	FVS 100 program FS	PAL, 200PR.(Option) NTSC
7	Operating environment	1)Temp : 0 ~ 40 deg 2)Humidity : 85%	
8	Storage environment	3)Temp : -20 ~ 60 deg 4)Humidity : 85%	
9	Display	LCD Module	LPL

5.General Specification(Monitor)

No.	Item	Specification			Unit	Remark
1	Panel	26" TFT WXGA LCD				
2	Frequency range	H:31 ~ 61KHz, V: 50 ~ 75Hz				DVI-I input
3	Control function	1) Contrast/ Brightness 2) H- Position/ V-Position 3) Tracking : Clock/Phase 4) Auto Configure 5) Reset				
4	Component Jack	1: Y 3: Pb 5: Pr 7: Line1 Ready 9: LINE2 11: LINE3 13: Line3 Ready				Middle east /NTSC Only
	D4 Jack (525i,525p,750p,1125i)	2: Y GND 4: Pb GND 6: Pr GND 8: LINE1 10: Line2 Ready 12: SWITCH GND 14: SWITCH				Japan only
5		H/V-Sync	Video	Power consumption		LED
	Power ON	ON/ON	Active	≤ Max 170	W	Red
	Stand by	OFF/ON	OFF	≤ 3.0	W	Red dimmed
	DPMS Mode	ON/OFF	OFF	≤typ.25	W	Red dimmed
	Power off	-	-	-	W	*
6	LCD Module	Type Size	LPL	622 x 389 x 53	mm	(H) x (V) x (D)
		Pixel Pitch	LPL	0.1475 x 0.4425 x RGB	mm	
		Pixel Format	1280 horiz By 768 vert. pixels RGB strip arrangement			
		Coating	Hard coating(3H), Anti-glare treatment of the front polarizer			
		Back Light	LPL	CCFL		

6.Optical Feature(LCD Module)

No.	Item	Specification				Remark
				LPL		
1	Viewing Angle <CR _i ~10>	R/L, U/D		176,176		
2	Luminance	Luminance(cd/§ ‡)		450		Typical
		Variation		1.3		MAX/MIN
3	Contrast Ratio			500		ALL white/All back
4	CIE Color Coordinates	WHITE	W _x	Typ.	0.284	LPL
			W _y	Typ.	0.295	
		RED	W _r	Typ.		
			Y _r	Typ.		
		Green	X _g	Typ.		
			Y _g	Typ.		
		Blue	X _b	Typ.		
			Y _b	Typ.		


7.Feature and Function

No.	Item	Specification	Remark
1	Teletext	TOP, FLOF, LIST 10 page	Top(option)
2	REMOCON	NEC code	PAL/NTSC
3	AV input	2(RT/RM) 1(RZ)	
4	S-AV input	1	Side
5	Component input	1	Rear(RT/RM)
6	PERI TV connector	Half SCART: 1	Rear(RZ)
7	PERI TV connector	Full SCART: 1	Rear(RZ)
8	RGB input	1	DVI
9	RS-232	1	D-Sub 9 pin(RM)
10	Discrete IR	1	(RM)
11	D-sub audio input	1	Stereo
12	2 Carrier stereo	BG,DK	
13	NICAM stereo	BG,I,LL'	
14	2 Carrier dual	BG,DK	
15	NICAM dual	BG,I,LL'	
16	DW(Double Window) mode	X	
17	MW(Multi Window) mode	X	
18	Film mode	O	
19	Noise reduction	X	
20	Progressive scan	O	
21	Motion detection	O	
22	SRS WOW	X	
23	Swivel Speaker	X	
24	EZ-pip	X	

8.PC Input Mode

NO	Resoluton	H-freq(kHz)	V-freq(Hz)	Pixel clock(MHz)	Proposed
DVI-PC, Analog RGB					
1	640 x 480	31.469	59.94	25.17	VESA(VGA)
2	640 x 480	35	67	30.24	VESA(VGA)
3	640 x 480	37.500	75.00	31.50	VESA(VGA)
4	800 x 600	35.156	56.25	36.00	VESA(SVGA)
5	800 x 600	37.879	60.31	40.00	VESA(SVGA)
6	800 x 600	48.077	72.18	50.00	VESA(SVGA)
7	800 x 600	46.875	75.00	49.50	VESA(SVGA)
8	1024 x 768	48.363	60.00	65.00	VESA(XGA)
9	1024 x 768	56.476	70.06	75.00	VESA(XGA)
10	1024 x 768	60.023	75.02	78.75	VESA(XGA)
11	1280 x 768	47.693	60.00	80.125	VESA(WXGA)

TIMING CHART

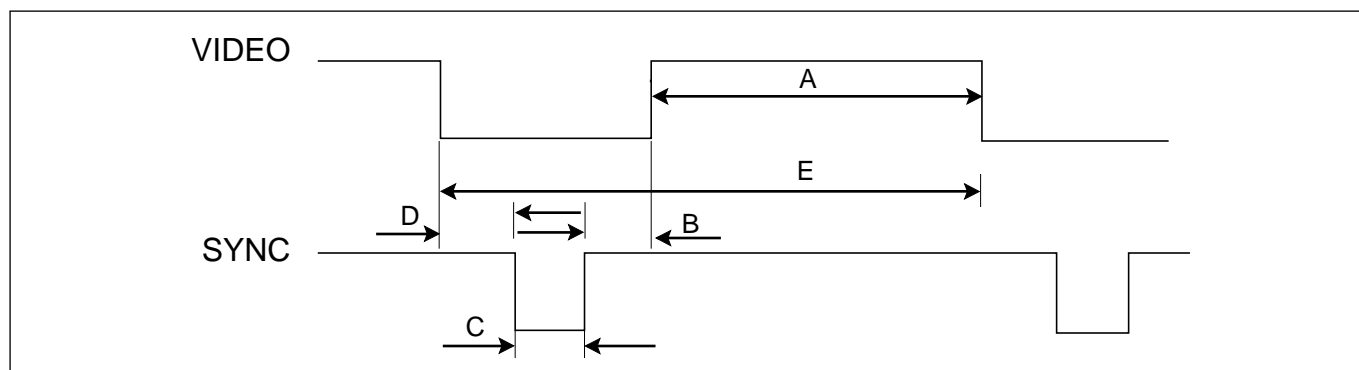

<< Dot Clock (MHz), Horizontal Frequency (kHz), Vertical Frequency (Hz), Horizontal etc... (μs), Vertical etc... (ms) >>

Mode	H/V Sort	Sync Polarity	Dot Clock	Frequency	Total Period (E)	Video Active Time (A)	Front Porch (B)	Sync Duration (D)	Back Porch (F)	Resolution
1	H	+	25.175	31.469	800	640	16	96	48	640x480
	V	-		59.94	525	480	10	2	33	
2	H	-	30.240	35	864	640	64	64	96	640x480
	V	+		66.667	525	480	3	3	39	
3	H	-	31.5	37.5	840	640	16	64	120	640x480
	V	-		75	500	480	1	3	16	
4	H	-	36	35.156	1024	800	24	72	128	800x600
	V	-		56.25	625	600	1	2	22	
5	H	+	40.0	37.879	1056	800	40	128	88	800x600
	V	+		60.317	628	600	1	4	23	
6	H	+	50.0	48.077	1040	800	56	120	64	800x600
	V	+		72.188	666	600	37	6	23	
7	H	+/-	49.5	46.875	1056	800	16	80	160	800x600
	V	+/-		75.0	625	600	1	3	21	
8	H	-	65.0	48.363	1344	1024	24	136	160	1024x768
	V	-		60.004	806	768	3	6	29	
9	H	+	75	56.476	1328	1024	24	136	144	1024x768
	V	+		70.069	806	768	3	6	29	
10	H	+	78.75	60.023	1312	1024	16	96	176	1024x768
	V	-		75.029	800	768	1	3	28	
11	H	+	79.50	47.776	1664	1280	64	128	192	1280x768
	V	-		59.870	798	768	3	7	20	

ADJUSTMENT INSTRUCTION

1. Application Object

This instruction is for the application to the LCD TV.

2. Adjustment

2.1 Auto Gain/Offset adjustment

2.1.1 Adjustment preparation

- 1) Conduct Heat Run with the White Pattern for more than 30 minutes.
- 2) Connect the signals of Pattern Generator to DVI-I Jack of LCD TV.

2.1.2 Auto Gain/Offset adjustment

- 1) Use the Pattern Generator (801GF, VG819) to authorize XGA (1024 X 768) for resolution and 16 gray scale signals for patterns. Or authorize 16 gray scale (11 gray scale) signals in accordance with VG819.
- 2) Press the IN-START Key to convert to the adjustment mode using the adjustment (SVC) remote controller, and press VOL+ Key at the AutoGain menu.
(In case of RM-26LZ30, press IN-START Key twice)
- 3) Once the adjustment is completed, press the Enter Key to save and finish the adjustment

2.2 EDID (The Extended Display Identification Data) setting

- 1) Connect D-Sub to DVI-I Cable with DVI-I Jack.
- 2) Select TV as an input source and press the [Instart] key on the remote control.
- 3) Select the OPT3 from the OSD menu and set Analog or Digital for DDC data selection.
- 4) Select Analog for analog data, and Digital for digital data.
- 5) Connect the DDC automation equipment and write the DDC data.

2.2.1 EDID DATA

[DDC DATA Analog]

	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F
00	00	FF	FF	FF	FF	FF	FF	00	1E	6D	FF	55	01	01	01	01
10	0C	0E	01	03	18	46	2B	78	EE	E8	AA	A1	57	49	9C	25
20	10	48	4B	AB	8C	00	45	4F	61	4F	81	CF	01	01	01	01
30	01	01	01	01	01	01	40	1F	00	90	51	00	1B	30	40	88
40	37	00	BC	AE	21	00	00	1C	00	00	00	FD	00	38	4B	1F
50	3D	0A	00	0A	20	20	20	20	20	20	00	00	00	FC	00	52
60	5A	32	36	4C	5A	35	30	0A	20	20	20	20	00	00	00	FC
70	00	0A	20	20	20	20	20	20	20	20	20	20	20	20	00	FE

[DDC DATA Digital]

	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F
00	00	FF	FF	FF	FF	FF	FF	00	1E	6D	00	56	01	01	01	01
10	0C	0E	01	03	98	46	2B	96	EE	E8	AA	A1	57	49	9C	25
20	10	48	4B	BF	EE	00	31	40	3B	CA	45	40	61	40	81	C0
30	81	CF	01	01	01	01	40	1F	00	90	51	00	1B	30	40	88
40	37	00	BC	AE	21	00	00	1C	00	00	00	FD	00	38	4B	1F
50	3D	0A	00	0A	20	20	20	20	20	20	00	00	00	FC	00	52
60	5A	32	36	4C	5A	35	30	0A	20	20	20	20	00	00	00	FC
70	00	0A	20	20	20	20	20	20	20	20	20	20	20	20	00	55

2.3 HDCP (High-Bandwidth Digital Contents Protection) Set

2.3.1 HDCP DVI(Digital Visual Interface) is the link which transmits HD video of HD and STB when in sleep mode.

This function prevents the hazard of hang display thus securing the security against the contents and copy protection.

2.3.2 To store in EEPROM(AT24C16) in HDCP function connect DVI cable.Detailed work content from work map reference.

**Note. : HDCP will temporarily exclude in spec.
HDCP will apply from USA Product later.**

3. Shipping Conditions

NO	ITEM		CONDITION	REMARK
1	Power		Off	
2	Volume Level		30	
3	Main Pcture Input		TV	
5	Main Last Channel		Pr 01	
8	Mute		Off	
9	ARC		16:9	
10	Station	Auto Program		
		Manual Program		
		Program Edit		
		Favorite Program	None	
11	Picture	PSM	Dynamic	
		Dynamic	Contrast	80
			Brightness	40
			Colour	70
			Sharpness	70
			Tint	0
14	Sound	SSM	Flat	NTSC OPTION
		AVL	Off	
		Balance	0	
15	Special	Input	TV	
		Child Lock	Off	
		Auto sleep	Off	
		Language	English(Area Management)	
16	PC	H-Position	Variable by each mode	
		V-Position		
		Clock		
		Phase		
		Auto Configure		

*Option(PAL)-RT-26LZ30 Only

NO	ITEM	CONDITION	REMARK
Option 1			
1	Side AV	1	0: Side AV Off 1: Side AV On
2	SCART	0	0: SCART Off 1: SCART On
3	PC	1	0: PC Off 1: PC On
4	SideComp	0	0: SideComp Off 1: SideComp On
5	16:9	1	0: Wide Off 1: Wide On
6	200PR	0	0: 100 Program 1: 200 Program
7	Text	1	0: Text Off 1: Text On
8	ACMS	1	0: ACMS On 1: ACMS Off
Option 2			
1	HiDev	0	0: HiDev Off 1: HiDev On
2	Hotel	0	0: Hotel Off 1: Hotel On
3	Top	1	0: Top Off 1: Top On
4	I II SAVE	1	0: Ch. Sound Non Memory 1: Ch. Sound Memory
5	Turbo Vol	0	0: except below area(Off) 1: Middle-east Area Vol On
6	Ch/Aus	0	0: except below area(Off) 1: China, Australia On

NO	ITEM	CONDITION	REMARK
Option 3			
1	Language	1	0: Eng Only 1: EU5 2: 12 nations(Europe) 3: Eng + Chines 4: Eng + Arab + Urdu 5: Eng + FARSI
2	Txt Lang	0	0: WEST EU 1: EAST EU 1 2: TURKY EU 3: EAST EU 2 4: CYRILLIC 1 5: CYRILLIC 2 6: CYRILLIC 3 7: TURKY GRE 1 8: TURKY GRE 2 9: TURKY GRE 3 10: ARAB FRAN 11: ARAB ENG 12: ARAB HEB 1 13: ARAB HEB 2 14: FARSI ENG 15: FARSI FRA 16: FARI ALL
3	Inch opt	0	reserved
4	DDCi	Analog	Analog: Analog Digital: Digital

EDID ADJUSTMENT

Windows EDID V1.0 User Manual

Operating System: MS Windows 98, 2000, XP


Port Setup: Windows 98 => Don't need setup

Windows 2000, XP => Need to Port Setup.


This program is available to LCD Monitor only.

1. Port Setup

- Copy "UserPort.sys" file to "c:\WINNT\system32\drivers" folder
- Run Userport.exe

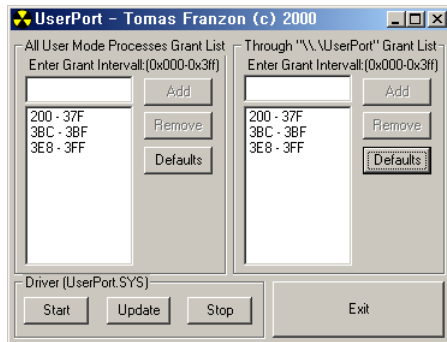


- Remove all default number
- Add 300-3FF

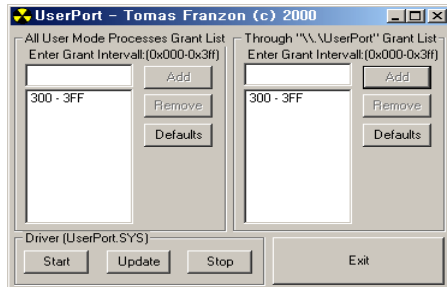

- Click Start button.
- Click Exit button.

2. EDID Read & Write

- Run WinEDID.exe

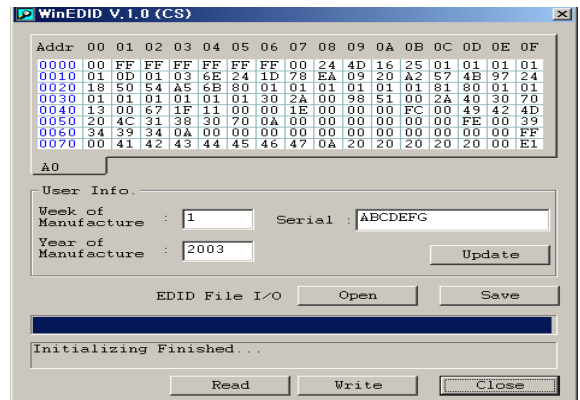

- Edit Week of Manufacture, Year of Manufacture, Serial Number

- Input User Info Data
- Click "Update" button
- Click "Write" button



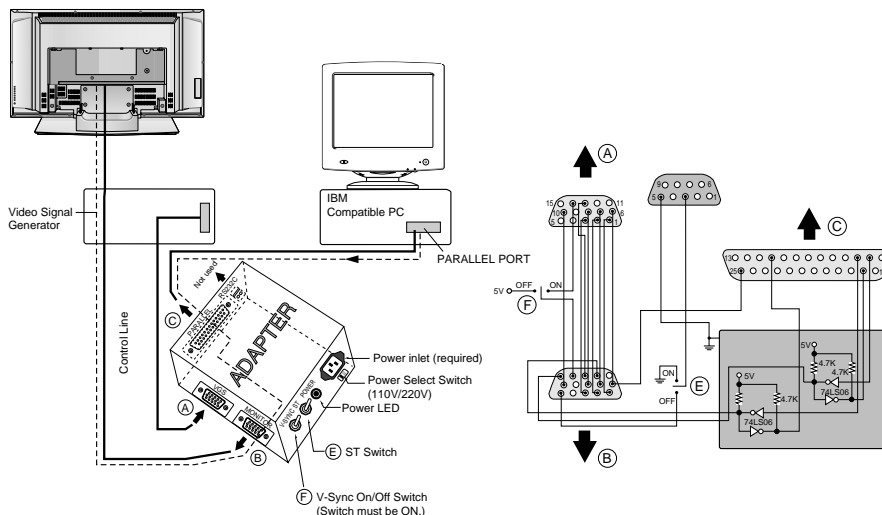



Figure 1. Cable Connection


SVC REMOCON


NO	KEY	FUNTION	REAMARK
1	POWER	To turn the TV on or off	
2	POWER ON	To turn the TV on automatically if the power is supplied to the TV. (Use the POWER key to deactivate): It should be deactivated when delivered.	
3	MUTE	To activate the mute function.	
4	P-CHECK	To check TV screen image easily.	Shortcut keys
5	S-CHECK	To check TV screen sound easily	Shortcut keys
6	ARC	To select size of the main screen (Normal, Spectacle, Wide or Zoom)	Shortcut keys
7	CAPTION	Switch to closed caption broadcasting	
8	TXT	To toggle on/off the teletext mode	
9	TV/AV	To select an external input for the TV screen	
10	TURBO SOUND	To start turbo sound	
11	TURBO PICTURE	To start turbo picture	
12	IN-START	To enter adjustment mode when manufacturing the TV sets.	Use the AV key to enter the screen W/B adjustment mode.
		To adjust the screen voltage (automatic): In-start ; mute ; Adjust ; AV(Enter into W/B adjustment mode)	
		W/B adjustment (automatic): After adjusting the screen ; W/B adjustment ; Exit two times (Adjustment completed)	
13	ADJ	To enter into the adjustment mode. To adjust horizontal line and sub-brightness.	
14	MPX	To select the multiple sound mode (Mono, Stereo or Foreign language)	
15	EXIT	To release the adjustment mode	
16	APC(PSM)	To easily adjust the screen according to surrounding brightness	
17	ASC(SSM)	To easily adjust sound according to the program type	
18	MULTIMEDIA	To check component input	Shortcut keys
19	FRONT-AV	To check the front AV	Shortcut keys
20	CH _i	To move channel up/down or to select a function displayed on the screen.	
21	VOL _i	To adjust the volume or accurately control a specific function.	
22	ENTER	To set a specific function or complete setting.	
23	PIP CH-(OP1)	To move the channel down in the PIP screen. To use as a red key in the teletext mode	
24	PIP CH+(OP2)	To move the channel in the PIP screen To use as a green key in the teletext mode	
25	PIP SWAP(OP3)	To switch between the main and sub screens To use as a yellow key in the teletext mode	
26	PIP INPUT(OP4)	To select the input status in the PIP screen To use as a blue key in the teletext mode	
27	EYE	To set a function that will automatically adjust screen status to match the surrounding brightness so natural color can be displayed.	
28	MENU	To select the functions such as video, voice, function or channel.	
29	IN-STOP	To set the delivery condition status after manufacturing the TV set.	
30	STILL	To halt the main screen in the normal mode, or the sub screen at the PIP screen. Used as a hold key in the teletext mode (Page updating is stopped.)	
31	TIME	Displays the teletext time in the normal mode Enables to select the sub code in the teletext mode	
32	SIZE	Used as the size key in the PIP screen in the normal mode Used as the size key in the teletext mode	
33	MULTI PIP	Used as the index key in the teletext mode (Top index will be displayed if it is the top text.)	
34	POSITION	To select the position of the PIP screen in the normal mode Used as the update key in the teletext mode (Text will be displayed if the current page is updated.)	
35	MODE	Used as Mode in the teletext mode	
36	PIP	To select the simultaneous screen	
37	TILT	To adjust screen tilt	Shortcut keys
38	0~9	To manually select the channel.	

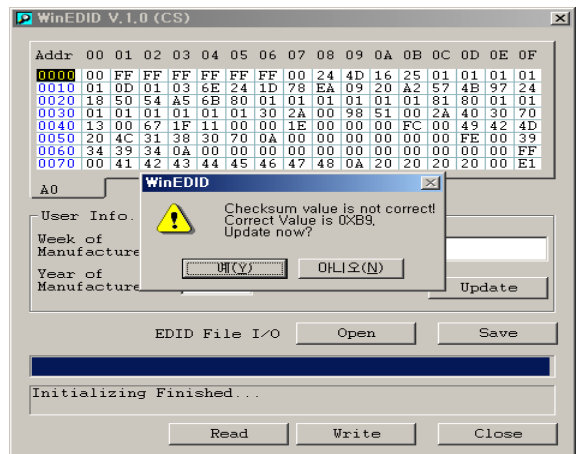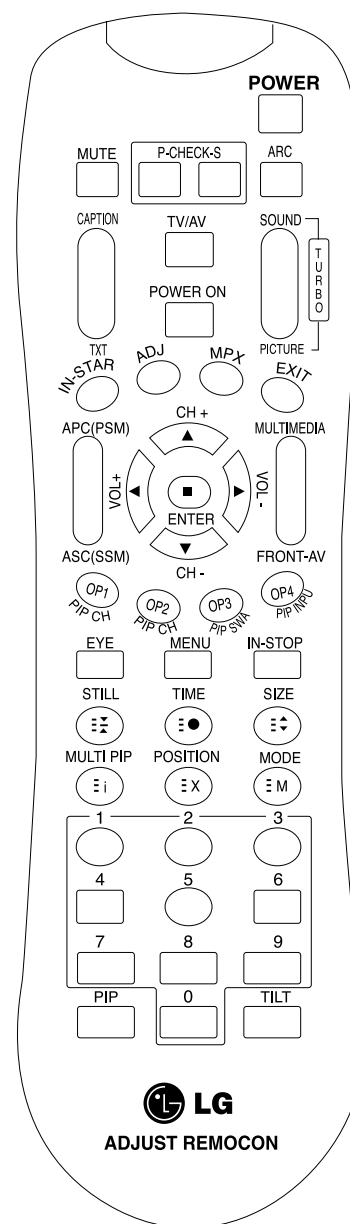



TROUBLESHOOTING

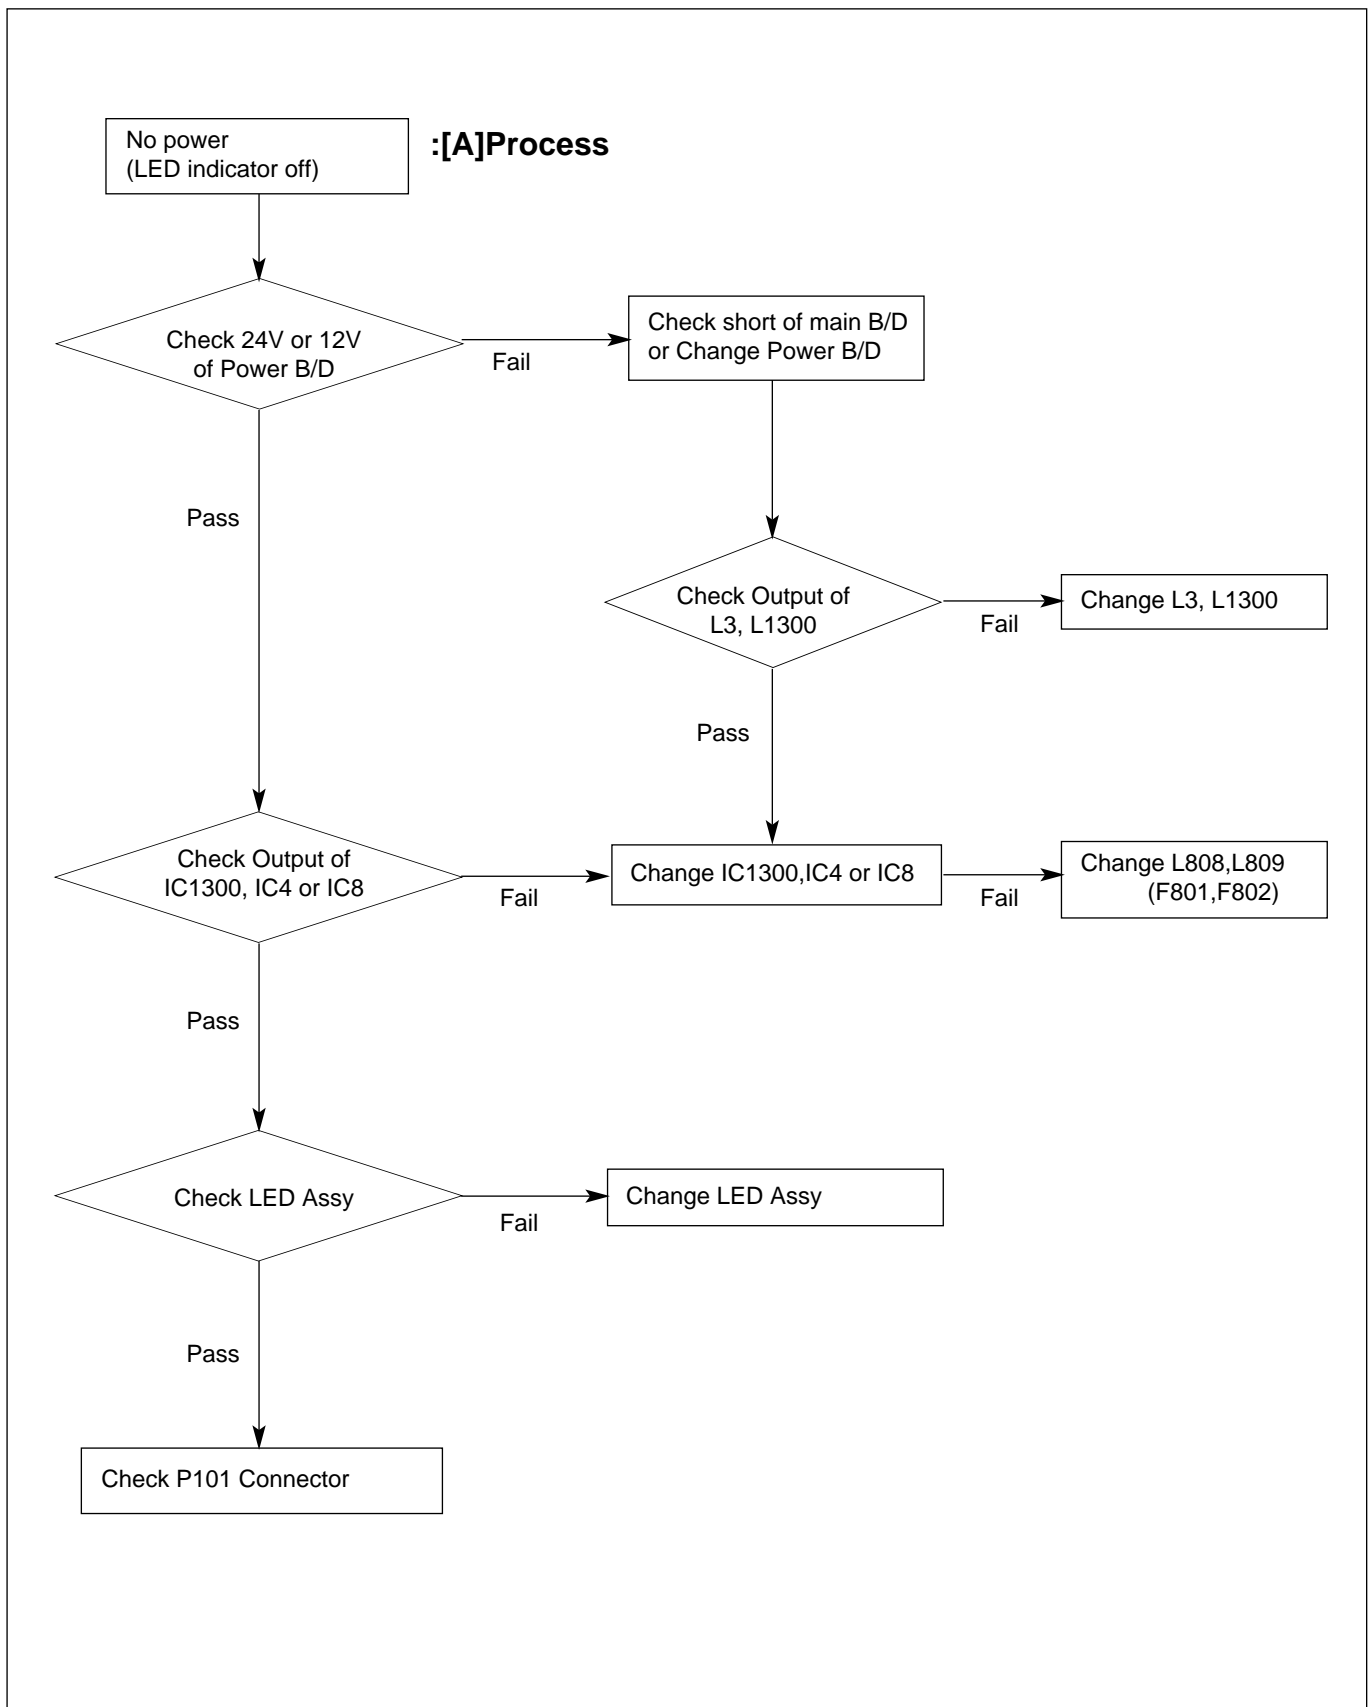

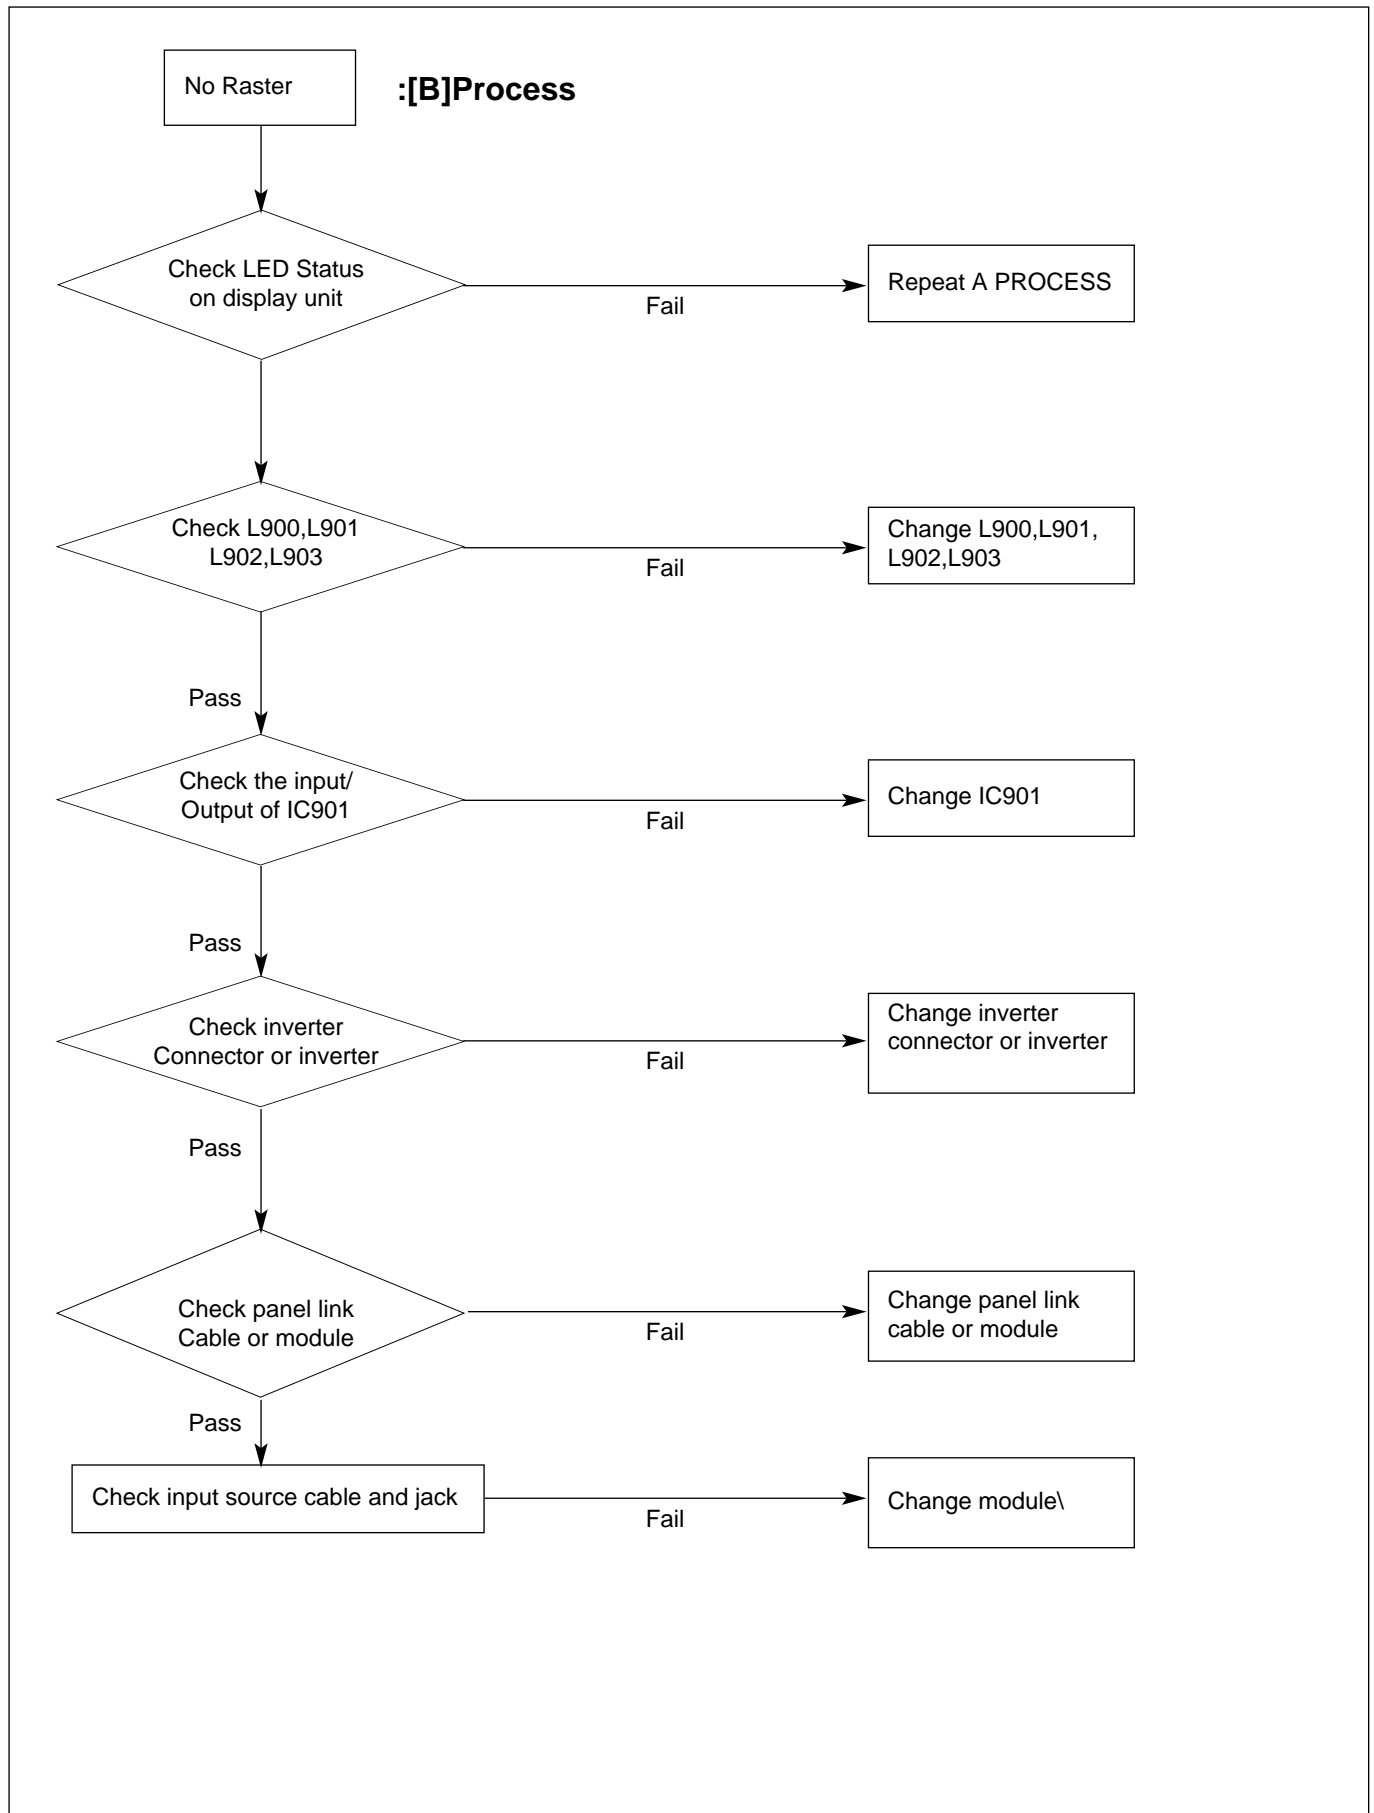


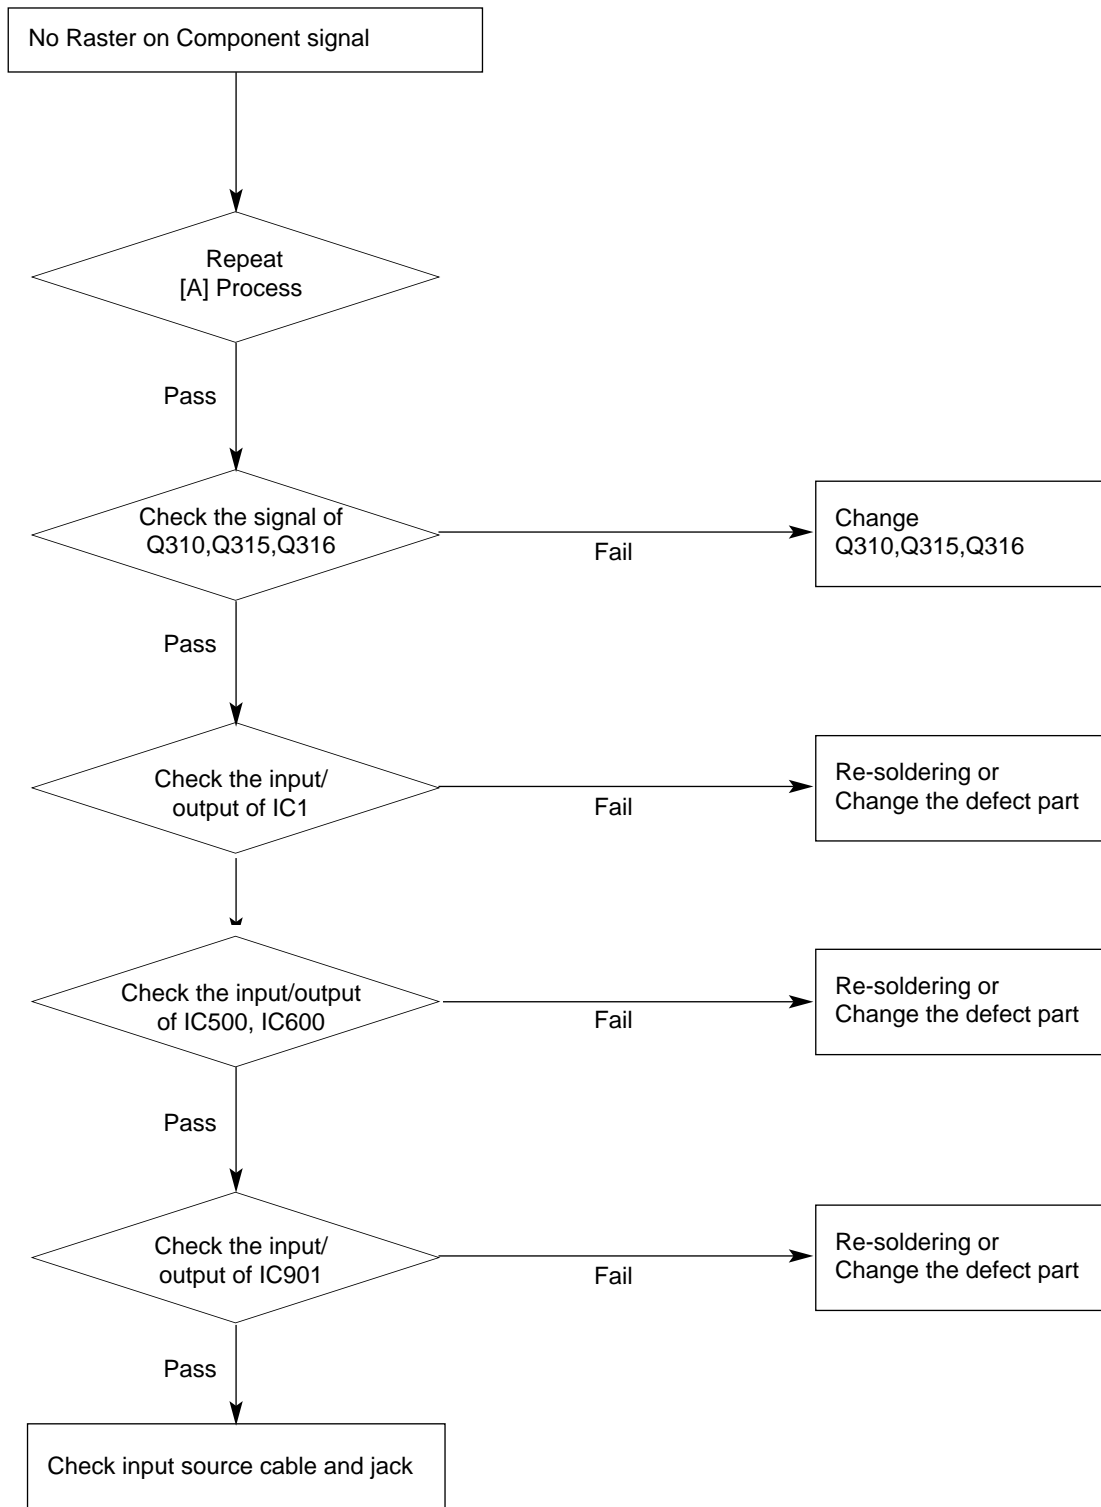

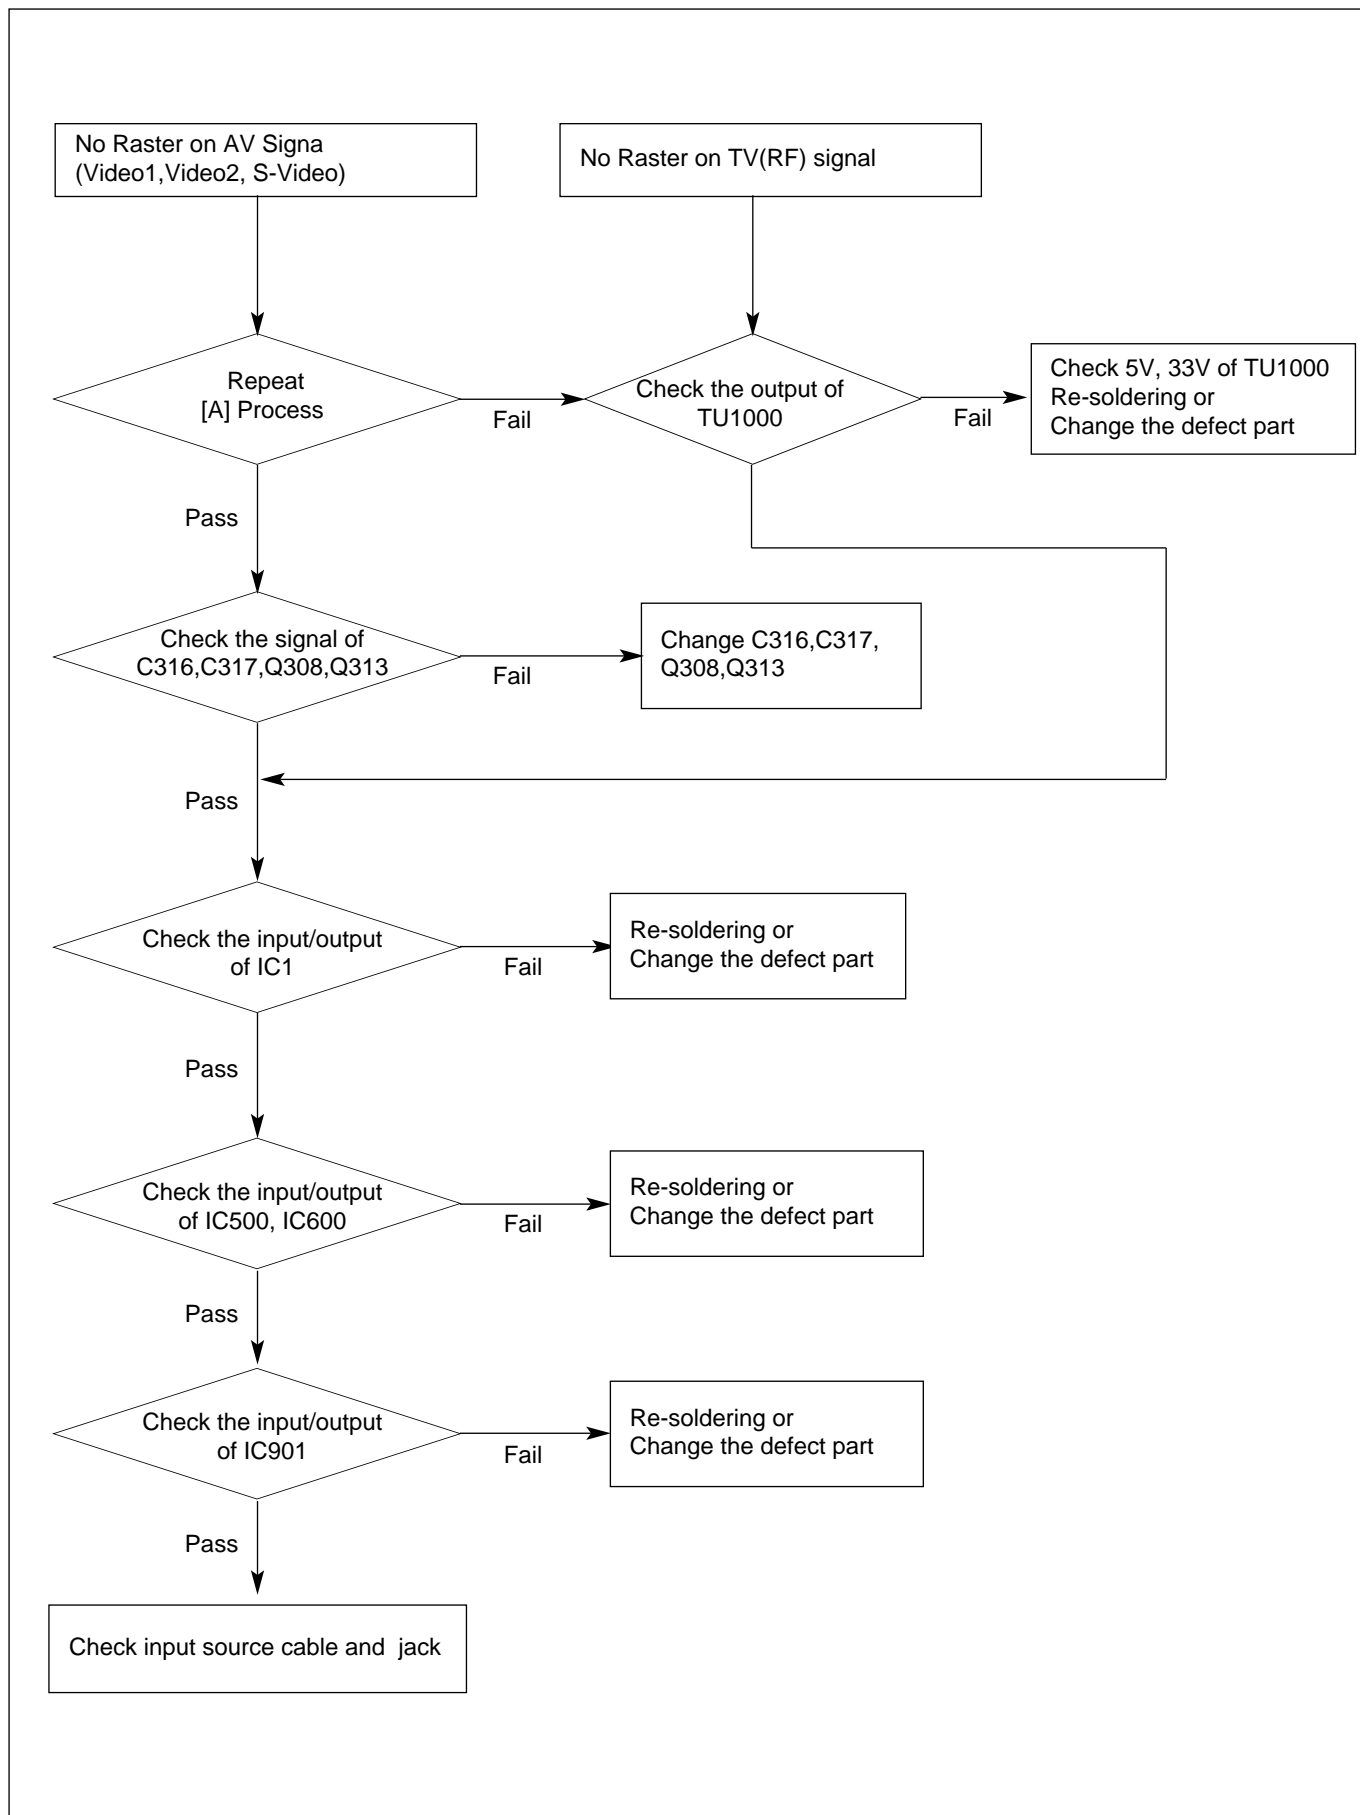

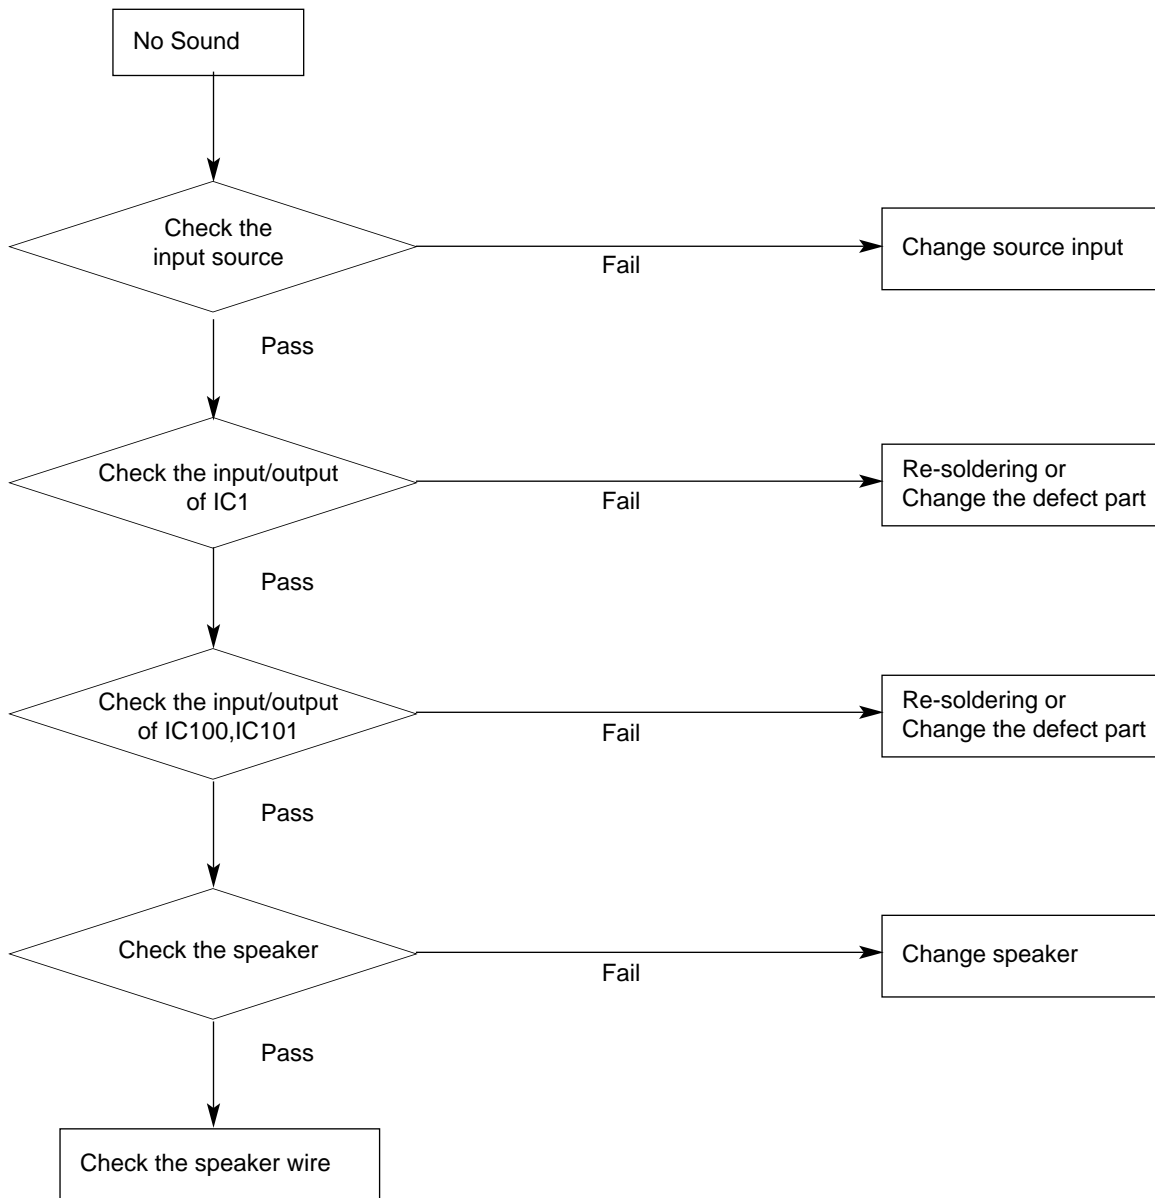

BLOCK DIAGRAM

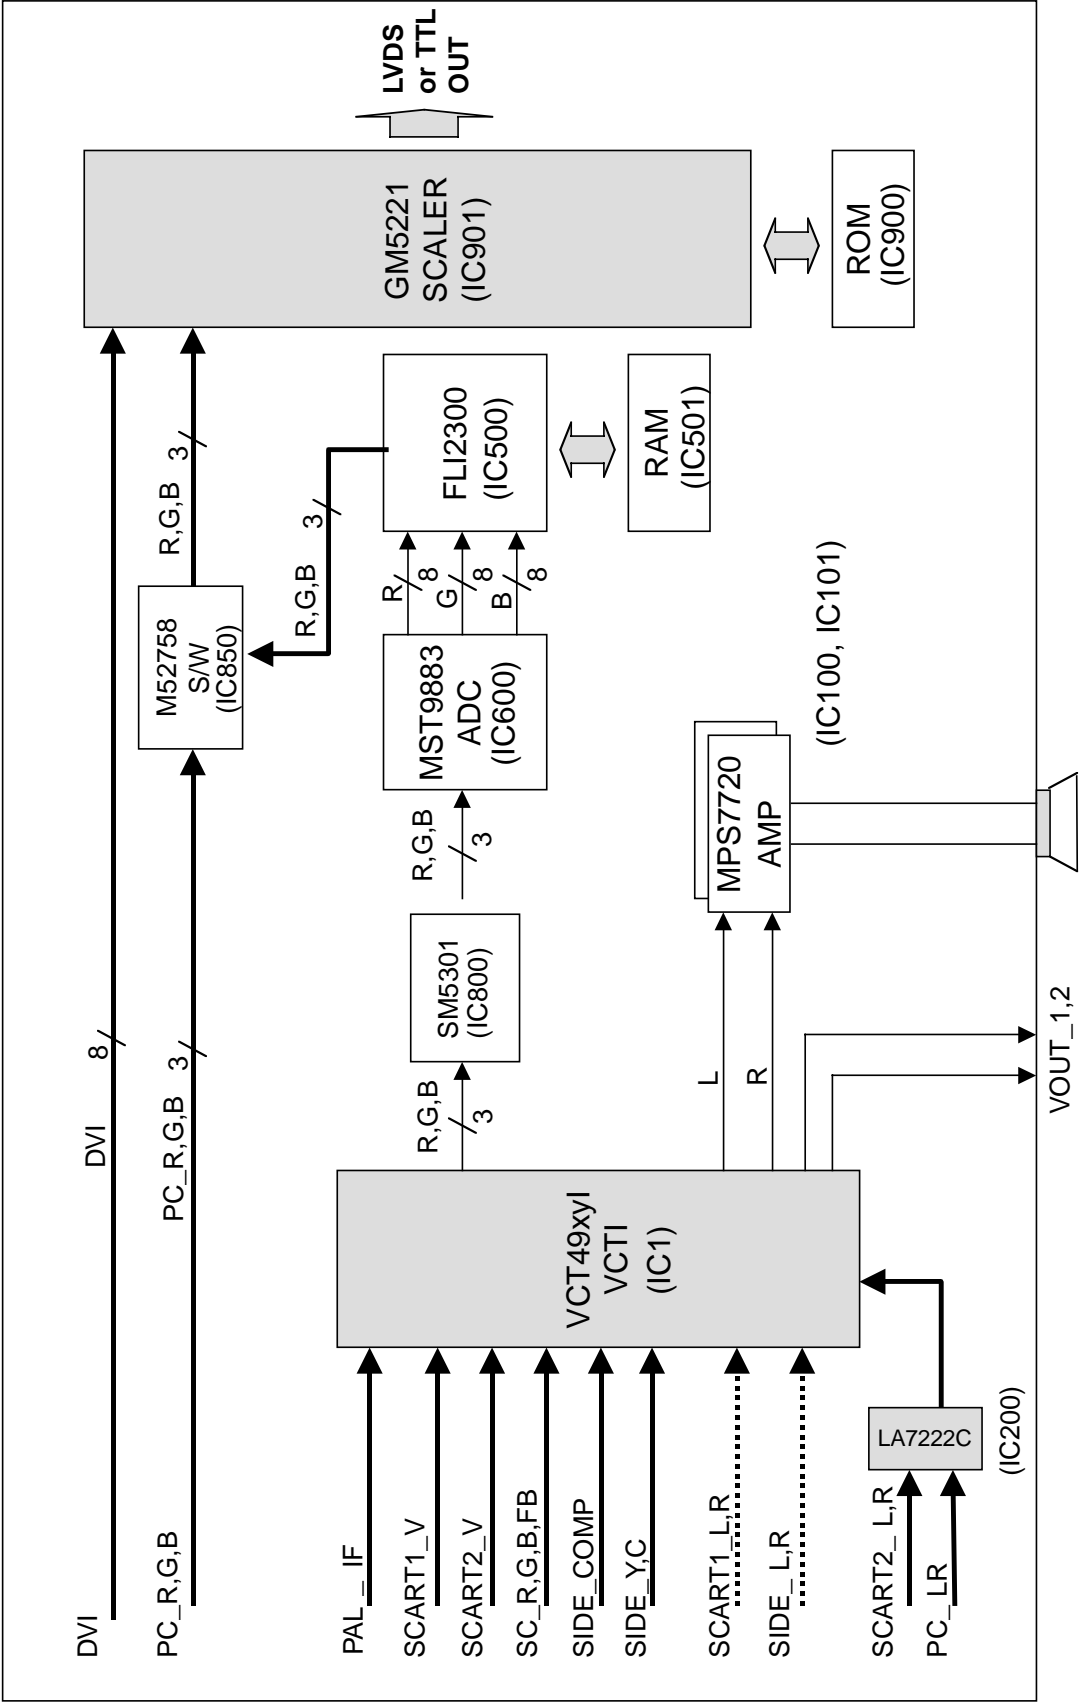

BLOCK DIAGRAM DESCRIPTION

1. Video controller unit and display data conversion unit

The video controller unit receives the video signal inputted to the tuner, AV port (AV1, AV2, S-Video and component) and converts it to the analog RGB signal through the microcomputer (VCTI) combined with the video decoder that integrates various functions in one chip.

Then, it is inputted to the AD converter (AD9883) and generates the 4:4:4 format digital signal. This digital signal is inputted to the picture enhancer (FLI2300), which processes the video signal and converts the image quality enhanced data to an analog RGB signal again before displaying it.

The image quality enhanced de-interlace signal is inputted to the scaler (GM5221) and converted to the LVDS signal by the integrated LVDS IC before being sent to the LCD module.

VCTI is the main microcomputer that processes both video signals and sound signals. It also processes the RF signal received from the tuner.

The scaler enables to adjust timing on the LCD panel, as well as an adjustment of the size and position of the input signal.

The graphic controller unit receives the PC (analog RGB) input and the DVI-D (digital signal), and sends the PC input to the scaler analog port and DVI-D input to the digital port.


The scaler receives two inputs and converts them to the LVDS signal before sending to the module.

2. Power unit

The power unit supplies 33V, 24V and 12V DC power to the main board. 33V DC power is used for the tuner, whereas 24V DC power is directly used by the inverter and the sound amplifier IC. 24V DC power is also used to generate 5V through the regulator. 12V DC power is used for the LCD panel.

5V DC is converted to 3.3V and 1.8V through the regulator, which supplies the necessary power to various ICs, such as VCTI, scaler, FLI2300 and AD9883.


WIRING DIAGRAM

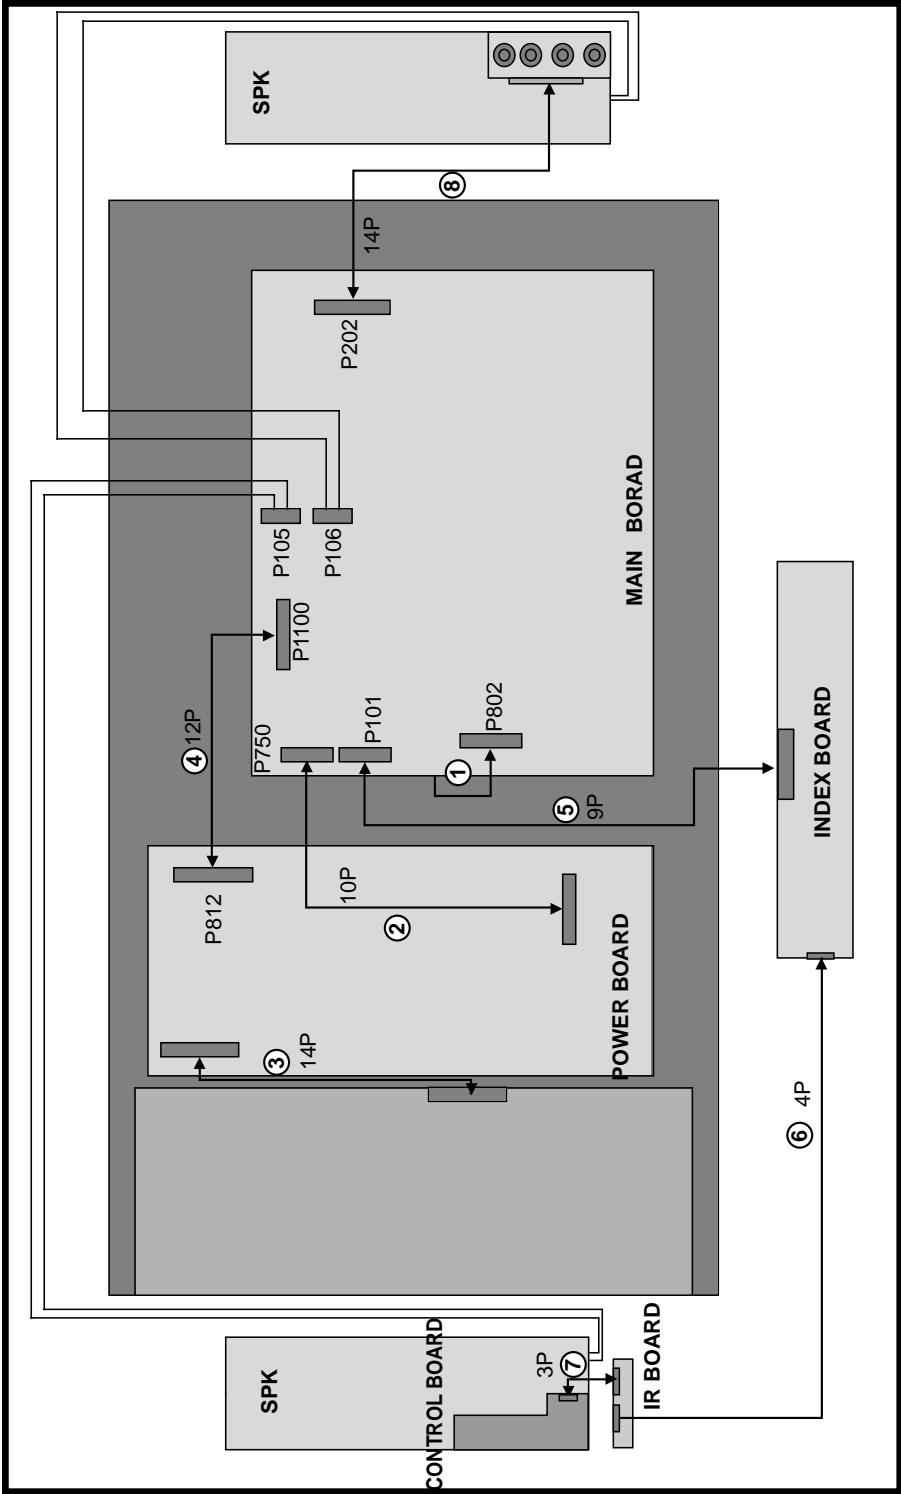

Wiring Part List

No.	Part No.
1	6631T11020A
2	6631T20033F
3	6631T20032A
4	6631T25019B
5	6631T20033H
6	6631T20033J
7	6631T20033D
8	6631T20033K

EXPLODED VIEW

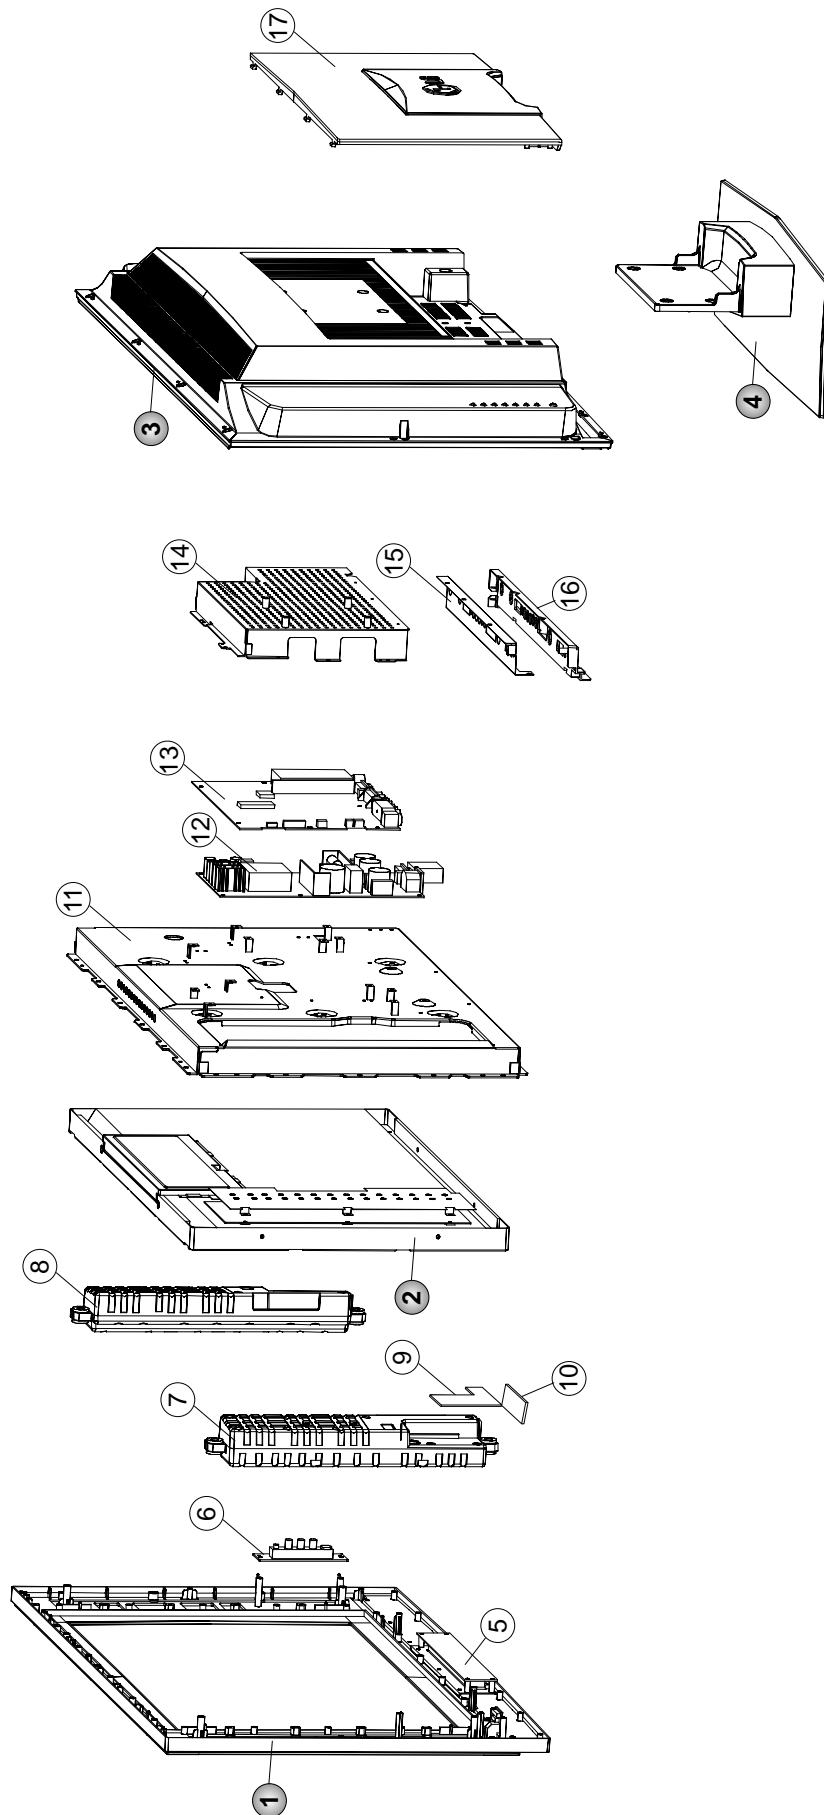

EXPLODED VIEW PARTS LIST

No.	PART NO.	DESCRIPTION
1	3091TKE009B	CABINET ASSEMBLY, RZ-26LZ30 BRAND -RT-26LZ30
	3091TKE009F	CABINET ASSEMBLY, RT-26LZ30 BRAND. SUFFIX: AHPLKGA -RT-26LZ30(Australia)
	3091TKE009C	CABINET ASSEMBLY, RM-26LZ30 BRAND -RM-26LZ30
	3091TKE009E	CABINET ASSEMBLY, RM-26LZ30 BRAND -RM-26LZ30 CKD
2	6304FLP118B	LCD(LIQUID CRYSTAL DISPLAY), LC260W01-A5K5 LG PHILIPS TFT COLOR WXGA,450NIT,LVDS,LG INNOTECK INVERTER
3	3809TKE008C	BACK COVER ASSEMBLY, RT-26LZ30
	3809TKE008H	BACK COVER ASSEMBLY, RT-26LZ30 . SUFFIX: AHPLKGA -RT-26LZ30(Australia)
	3809TKE008J	BACK COVER ASSEMBLY, RT-26LZ30 . ARPAKPA
	3809TKE008D	BACK COVER ASSEMBLY, RM-26LZ30
	3809TKE008F	BACK COVER ASSEMBLY, RM-26LZ30 SKD
4	3043TKK164A	TILT SWIVEL ASSEMBLY, RN-26LZ30 3550TKK532A -RT-26LZ30
	3043TKK164C	TILT SWIVEL ASSEMBLY, RM-26LZ30
	3043TKK164D	TILT SWIVEL ASSEMBLY, RM-26LZ30, CKD
5	6871TST629A	PWB(PCB) ASSEMBLY,SUB, RZ-23LZ50 KEY CONTROL AUTO BRAND KEY BOARD -RT-26LZ30
	6871TST629B	PWB(PCB) ASSEMBLY,SUB, RM-26LZ30 INDEX LED & P/SW TOTAL BRAND
6	6871TVT372A	PWB(PCB) ASSEMBLY, VIDEO, 26LZ30 SIDE A/V VIDEO TOTAL BRAND SIDE A/V BOARD
7	6401TZZ050A	SPEAKER ASSEMBLY, RZ-26LZ30 4 OHM, LEFT
8	6401TZZ049A	SPEAKER ASSEMBLY, RZ-26LZ30 4 OHM, RIGHT
9	6871TST628A	PWB(PCB) ASSEMBLY, SUB, 26LZ30 KEY CONTROL TOTAL BRAND KEY BOARD
10	6871TST627A	PWB(PCB) ASSEMBLY,SUB, 26LZ30 IR CONTROL TOTAL BRAND IR BOARD
11	4951TKS171B	METAL ASSEMBLY, FRAME MAIN, RZ/RT/RM-26LZ30
	4951TKS171C	METAL ASSEMBLY, FRAME MAIN, CKD RM-26LZ30
12	6871TPT275A	PWB(PCB) ASSEMBLY,POWER RZ-30LZ50 POWER TOTAL BRAND ML-041A, 23",26",27",30",32" AUTOBAN
13	3313TP2019D	MAIN TOTAL ASSEMBLY, RT-26LZ30 BRAND ML-041A
	3313TN2012C	MAIN TOTAL ASSEMBLY, RM-26LZ30 BRAND ML-041A
14	4951TKS159D	METAL ASSEMBLY, SHIELD REAR , RT/RM-26LZ30
	4951TKS159F	METAL ASSEMBLY, SHIELD REAR , RT/RM-26LZ30 CKD
15	3551TKK534B	COVER ASSEMBLY, RT-26LZ30 REAR . A/V
	3551TKK534C	COVER ASSEMBLY, RM/RT-26LZ30 REAR BRACKET, APPLY RESIN: V0- RT-26LZ30(Australia) , RM-26LZ30
16	3550TKK579B	COVER, RT-26LZ30 , REAR A/V
	3550TKK579C	COVER, RM/RT-26LZ30 REAR BRACKET, APPLY RESIN: V0- RT-26LZ30(Australia) , RM-26LZ30
17	4950TKK883B	METAL, SHIELD REAR A/V
18	3550TKK531A	COVER, RN-26LZ30 REAR AV -RT/RM-26LZ30
	3550TKK531B	COVER, RZ-26LZ30(SKD) REAR COVER -RM-26LZ30 CKD

REPLACEMENT PARTS LIST

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;

CC, CX, CK, CN, CH : Ceramic
CQ : Polyester
CE : Electrolytic
CF : Fixed Film

RD : Carbon Film
RS : Metal Oxide Film
RN : Metal Film
RH : CHIP, Metal Glazed(Chip)
RR : Drawing

DATE: 2004. 07. 14.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
MAIN BOARD				
CAPACITOR				
		C108	OCE476EK638	47UF KMG 50V M FM5 TP 5
		C1100	OCE106BF618	10UF KME 16V M FL TP5
		C1102	OCE107CK638	"100UF SHL,SD 50V M FM5 TP 5"
		C1112	OCE108EF630	1000UF KMG 16V M FM5 BULK
		C1113	OCE108EF630	1000UF KMG 16V M FM5 BULK
		C1114	OCE108EF630	1000UF KMG 16V M FM5 BULK
		C1115	OCE108EF630	1000UF KMG 16V M FM5 BULK
		C119	OCE106BF618	10UF KME 16V M FL TP5
		C120	OCE106BF618	10UF KME 16V M FL TP5
		C1202	OCE477EJ630	470UF KMG 35V M FM5 BULK
		C123	OCE477EJ630	470UF KMG 35V M FM5 BULK
		C124	OCE477EJ630	470UF KMG 35V M FM5 BULK
		C1299	OCE477EJ630	470UF KMG 35V M FM5 BULK
		C1304	OCE477EJ630	470UF KMG 35V M FM5 BULK
		C131	OCE477EJ630	470UF KMG 35V M FM5 BULK
		C132	OCE477EJ630	470UF KMG 35V M FM5 BULK
		C133	OCE477EJ630	470UF KMG 35V M FM5 BULK
		C134	OCE477EJ630	470UF KMG 35V M FM5 BULK
		C404	OCE227EJ638	220UF KMG 35V M FM5 TP 5
		C1015	OCH6680K416	68PF 50V J NP0 2012 R/TP
		C1016	OCH6680K416	68PF 50V J NP0 2012 R/TP
		C13	OCH6102K406	1000PF 50V J SL 2012 R/TP
		C1303	OCH6101K416	100PF 50V J NP0 2012 R/TP
		C1308	OCH6101K416	100PF 50V J NP0 2012 R/TP
		C14	OCH6102K406	1000PF 50V J SL 2012 R/TP
		C2	OCH6102K406	1000PF 50V J SL 2012 R/TP
		C20	OCH6102K406	1000PF 50V J SL 2012 R/TP
		C200	OCH6221K416	220PF 50V J NP0 2012 R/TP
		C237	OCH6102K406	1000PF 50V J SL 2012 R/TP
		C238	OCH6102K406	1000PF 50V J SL 2012 R/TP
		C319	OCH6120K416	12PF 50V J NP0 2012 R/TP
		C321	OCH6120K416	12PF 50V J NP0 2012 R/TP
		C324	OCH6120K416	12PF 50V J NP0 2012 R/TP
		C326	OCH6120K416	12PF 50V J NP0 2012 R/TP
		C327	OCH6120K416	12PF 50V J NP0 2012 R/TP
		C328	OCH6120K416	12PF 50V J NP0 2012 R/TP
		C329	OCH6120K416	12PF 50V J NP0 2012 R/TP
		C331	OCH6150K416	15PF 50V J NP0 2012 R/TP
		C333	OCH6150K416	15PF 50V J NP0 2012 R/TP
		C336	OCH6150K416	15PF 50V J NP0 2012 R/TP
		C338	OCH6150K416	15PF 50V J NP0 2012 R/TP
		C339	OCH6150K416	15PF 50V J NP0 2012 R/TP
		C340	OCH6150K416	15PF 50V J NP0 2012 R/TP
		C341	OCH6150K416	15PF 50V J NP0 2012 R/TP
		C43	OCH6102K406	1000PF 50V J SL 2012 R/TP
		C46	OCH6102K406	1000PF 50V J SL 2012 R/TP
		C50	OCH6102K406	1000PF 50V J SL 2012 R/TP
		C515	OCH6330K416	33PF 50V J NP0 2012 R/TP
		C516	OCH6330K416	33PF 50V J NP0 2012 R/TP
		C53	OCH6102K406	1000PF 50V J SL 2012 R/TP
		C59	OCH6102K406	1000PF 50V J SL 2012 R/TP
		C701	OCH6120K416	12PF 50V J NP0 2012 R/TP
		C702	OCH6120K416	12PF 50V J NP0 2012 R/TP
		C74	OCH6102K406	1000PF 50V J SL 2012 R/TP

DATE: 2004. 07. 14.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C755	OCH6471K416	470F 50V J NP0 2012 R/TP
		C756	OCH6471K416	470F 50V J NP0 2012 R/TP
		C757	OCH6471K416	470F 50V J NP0 2012 R/TP
		C758	OCH6101K416	100PF 50V J NP0 2012 R/TP
		C83	OCH6102K406	1000PF 50V J SL 2012 R/TP
		C86	OCH6102K406	1000PF 50V J SL 2012 R/TP
		C924	OCH6050K116	5PF 50V D NP0 2012 R/TP
		C925	OCH6050K116	5PF 50V D NP0 2012 R/TP
		C129	181-007F	"MPE ECQ-V1H224JL3(TR), 50V 0"
		C130	181-007F	"MPE ECQ-V1H224JL3(TR), 50V 0"
		C1001	OCH3103K516	10000PF 50V 10% B(Y5P) 2012
		C1002	OCH3103K516	10000PF 50V 10% B(Y5P) 2012
		C1003	OCH3103K516	10000PF 50V 10% B(Y5P) 2012
		C1004	OCH3103K516	10000PF 50V 10% B(Y5P) 2012
		C1007	OCH3103K516	10000PF 50V 10% B(Y5P) 2012
		C1010	OCK273DK51A	27000PF 2012 50V 10% B(Y5P)
		C107	OCK225DFK4A	"2.2UF 2012 16V 20%,-20% F(Y5)"
		C109	OCH3103K516	10000PF 50V 10% B(Y5P) 2012
		C11	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C110	OCH3103K516	10000PF 50V 10% B(Y5P) 2012
		C113	OCK225DFK4A	"2.2UF 2012 16V 20%,-20% F(Y5)"
		C114	OCK225DFK4A	"2.2UF 2012 16V 20%,-20% F(Y5)"
		C12	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C127	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C128	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C1300	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C1302	OCH3103K516	10000PF 50V 10% B(Y5P) 2012
		C1305	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C1307	OCH3103K516	10000PF 50V 10% B(Y5P) 2012
		C135	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C136	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C15	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C16	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C18	OCK106EF56A	10UF 3216 16V 10% X7R R/TP
		C19	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C23	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C3	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C306	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C318	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C4	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C42	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C44	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C45	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C49	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C500	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C505	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C506	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C507	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C508	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C509	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C51	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C510	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C511	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C512	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP

DATE: 2004. 07.14.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C923	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C926	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C927	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C928	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C929	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C930	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C931	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C935	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C936	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C938	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C939	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C940	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C941	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C942	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C943	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C944	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C945	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C946	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C947	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C948	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C949	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C950	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C951	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C952	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C958	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C96	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C960	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C963	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C969	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C970	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C973	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C10	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C115	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C116	0CK562CK51A	5600PF 1608 50V 10% R/TP B(Y
		C117	0CK562CK51A	5600PF 1608 50V 10% R/TP B(Y
		C118	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C125	0CK105EK56A	1UF 3216 50V 10% X7R R/TP
		C126	0CK105EK56A	1UF 3216 50V 10% X7R R/TP
		C1301	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y
		C1306	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y
		C25	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C26	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C27	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C28	0CK334CF94A	"0.33UF 1608 16V 80%,-20% F(Y"
		C29	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C30	0CK334CF94A	"0.33UF 1608 16V 80%,-20% F(Y"
		C31	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C32	0CK334CF94A	"0.33UF 1608 16V 80%,-20% F(Y"
		C33	0CK334CF94A	"0.33UF 1608 16V 80%,-20% F(Y"
		C34	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C35	0CK334CF94A	"0.33UF 1608 16V 80%,-20% F(Y"
		C36	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C37	0CK334CF94A	"0.33UF 1608 16V 80%,-20% F(Y"
		C38	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C39	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C40	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C41	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C504	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C524	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C611	0CK473CK56A	47000PF 1608 50V 10% R/TP X7
		C612	0CK473CK56A	47000PF 1608 50V 10% R/TP X7
		C613	0CK473CK56A	47000PF 1608 50V 10% R/TP X7

DATE: 2004. 07.14.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C626	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C7	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C70	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C71	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C72	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C73	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C750	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C752	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C753	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C759	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C78	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C8	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C800	0CK105CF94A	"1UF 1608 16V 80%,-20% R/TP F"
		C801	0CK105CF94A	"1UF 1608 16V 80%,-20% R/TP F"
		C802	0CK105CF94A	"1UF 1608 16V 80%,-20% R/TP F"
		C803	0CK105CF94A	"1UF 1608 16V 80%,-20% R/TP F"
		C9	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C901	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y
		C902	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y
		C903	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y
		C904	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y
		C905	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y
		C906	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y
		C907	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y
		C352	0CC270DK41A	27PF 1608 50V 5% NP0 R/TP
		C121	0CC100CK41A	10PF 1608 50V 5% R/TP NP0
		C122	0CC100CK41A	10PF 1608 50V 5% R/TP NP0
		C202	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C203	0CC221CK41A	220PF 1608 50V 5% R/TP NP0
		C204	0CC471CK41A	470PF 1608 50V 5% R/TP NP0
		C205	0CC471CK41A	470PF 1608 50V 5% R/TP NP0
		C207	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C209	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C21	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C210	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C211	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C214	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C217	0CC471CK41A	470PF 1608 50V 5% R/TP NP0
		C218	0CC471CK41A	470PF 1608 50V 5% R/TP NP0
		C22	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C220	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C222	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C223	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C224	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C24	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C343	0CC270CK41A	27PF 1608 50V 5% R/TP NP0
		C345	0CC270CK41A	27PF 1608 50V 5% R/TP NP0
		C348	0CC270CK41A	27PF 1608 50V 5% R/TP NP0
		C350	0CC270CK41A	27PF 1608 50V 5% R/TP NP0
		C351	0CC270CK41A	27PF 1608 50V 5% R/TP NP0
		C353	0CC270CK41A	27PF 1608 50V 5% R/TP NP0
		C47	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C48	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C501	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C600	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C601	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C602	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C603	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C610	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C754	0CC471CK41A	470PF 1608 50V 5% R/TP NP0
		C85	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C111	0CE475EK638	4.7UF KMG 50V 20% FM5 TP 5

DATE: 2004. 07.14.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C112	0CE475EK638	4.7UF KMG 50V 20% FM5 TP 5
		C100	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C1006	0CH8106J691	10UF 35V 20% 105STD (CYL) R/
		C1008	0CE227WF6DC	220UF MVK 16V 20% R/TP(SMD)
		C17	0CH8106J691	10UF 35V 20% 105STD (CYL) R/
		C206	0CH8226F691	22UF 16V 20% 105STD (CYL) R/
		C208	0CH8226F691	22UF 16V 20% 105STD (CYL) R/
		C219	0CH8226F691	22UF 16V 20% 105STD (CYL) R/
		C221	0CH8226F691	22UF 16V 20% 105STD (CYL) R/
		C225	0CH8106J691	10UF 35V 20% 105STD (CYL) R/
		C226	0CH8106J691	10UF 35V 20% 105STD (CYL) R/
		C227	0CH8106J691	10UF 35V 20% 105STD (CYL) R/
		C228	0CH8106J691	10UF 35V 20% 105STD (CYL) R/
		C231	0CH8106J691	10UF 35V 20% 105STD (CYL) R/
		C232	0CH8106J691	10UF 35V 20% 105STD (CYL) R/
		C235	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C236	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C300	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C301	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C302	0CH8106F691	10UF 16V 20% 105STD (CYL) R/
		C303	0CH8106F691	10UF 16V 20% 105STD (CYL) R/
		C304	0CH8106F691	10UF 16V 20% 105STD (CYL) R/
		C307	0CH8106F691	10UF 16V 20% 105STD (CYL) R/
		C308	0CH8476H691	47UF 25V 20% 105STD (CYL) R/
		C309	0CH8106F691	10UF 16V 20% 105STD (CYL) R/
		C312	0CH8106F691	10UF 16V 20% 105STD (CYL) R/
		C313	0CH8476H691	47UF 25V 20% 105STD (CYL) R/
		C314	0CH8106F691	10UF 16V 20% 105STD (CYL) R/
		C315	0CH8106F691	10UF 16V 20% 105STD (CYL) R/
		C316	0CH8106F691	10UF 16V 20% 105STD (CYL) R/
		C317	0CH8106F691	10UF 16V 20% 105STD (CYL) R/
		C5	0CE475WJ6DC	4.7UF MVK 35V 20% R/TP(SMD)
		C502	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C503	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C52	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C520	0CH8106F691	10UF 16V 20% 105STD (CYL) R/
		C525	0CH8106F691	10UF 16V 20% 105STD (CYL) R/
		C54	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C543	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C55	0CH8476H691	47UF 25V 20% 105STD (CYL) R/
		C560	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C566	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C604	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C605	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C607	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C62	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C63	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C703	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C805	0CE227WF6DC	220UF MVK 16V 20% R/TP(SMD)
		C806	0CE227WF6DC	220UF MVK 16V 20% R/TP(SMD)
		C807	0CE227WF6DC	220UF MVK 16V 20% R/TP(SMD)
		C814	0CE227WF6DC	220UF MVK 16V 20% R/TP(SMD)
		C815	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C857	0CE227WF6DC	220UF MVK 16V 20% R/TP(SMD)
		C858	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C859	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C860	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C861	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C862	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C863	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C87	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C88	0CH8476H691	47UF 25V 20% 105STD (CYL) R/

DATE: 2004. 07.14.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C900	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C953	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C956	0CH8476H691	47UF 25V 20% 105STD (CYL) R/
		C957	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C959	0CH8476F691	47UF 16V 20% 105STD (CYL) R/
		C97	0CH8476H691	47UF 25V 20% 105STD (CYL) R/
		C972	0CH8476H691	47UF 25V 20% 105STD (CYL) R/
DIODES				
		D100	0DRFC00288A	SS14 FAIR CHILD R/TP SMA 20-
		D101	0DRFC00288A	SS14 FAIR CHILD R/TP SMA 20-
		IC751	0DRSE00018A	SRV05-4.TC SEMTECH R/TP SOT2
		IC754	0DRSE00018A	SRV05-4.TC SEMTECH R/TP SOT2
		ZD1300	0DR340009AA	MBRS340 TP FAIRCHILD NON 40V
		ZD1301	0DR340009AA	MBRS340 TP FAIRCHILD NON 40V
		D107	0DS226009AA	KDS226 TP KEC SOT-23 80V 30
		D711	0DD184009AA	KDS184 TP KEC - 85V - - - 30
		D102	0DS181009AA	KDS181 TP KEC SOT-23 80V 3
		D103	0DS181009AA	KDS181 TP KEC SOT-23 80V 3
		D104	0DZ620009HB	UDZ S 6.2B TP ROHM SOD323 20
		D105	0DZ620009HB	UDZ S 6.2B TP ROHM SOD323 20
		D703	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		D704	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		ZD201	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		ZD202	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		ZD215	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		ZD216	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		ZD217	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		ZD218	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		ZD219	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		ZD220	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		ZD1000	0DZ330009DF	MTZJ33B TP ROHM-K DO34 0.5W
		D700	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		D701	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		D702	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		D705	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		D706	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		ZD10	0DZ910009FE	UDZS 9.1B TP ROHM - - 9.1V -
		ZD203	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		ZD204	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		ZD205	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		ZD206	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		ZD207	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		ZD208	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		ZD210	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		ZD213	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		ZD214	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		ZD221	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		ZD851	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
		ZD852	0DZRM00178A	UDZS TE-17 5.1B ROHM R/TP SM
IC				
		IC3	0IKE702700D	"KIA7027AF 3, SOT-89 TP RESET"
		IC200	0ISA722200A	LA7222 (1280 AUDIO) - - -
		IC501	0IMMRB010A	"M12L64322A-6T ESMT 86P,TSOP"
		IC749	0IMMRSG036A	"M24C02-WMN6T SGS-THOMSON 8P,"
		IC753	0IMMRSG036A	"M24C02-WMN6T SGS-THOMSON 8P,"
		IC907	0IMCRAL006A	AT24C16AN-10SI-2.7 ATMEL 8P
		IC918	0IMCRAL006A	AT24C16AN-10SI-2.7 ATMEL 8P
		IC100	0IMCRMZ002A	MP7720 MONOLITHIC POWER SYST

DATE: 2004. 07.14.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		IC101	0IMCRMZ002A	MP7720 MONOLITHIC POWER SYST
		IC1300	0IMCRMZ001A	MP1583DN MONOLITHIC POWER SY
		IC1301	0IMCRMZ001A	MP1583DN MONOLITHIC POWER SY
		IC500	0IMCRGN002C	FLI2300BD GENESIS 208P PQFP
		IC750	0IMCRSG010A	ST3232CDR SGS-THOMSON SOP16
		IC850	0IMCRM1006A	"M52758FP MITSUBISHI 36PIN, R"
		IC702	0IMO140662A	"MC14066BDR2 14P,SOIC TP BILA"
		IC1	0IPRPMN003C	VCT49XYF C7(NTSC+PAL) MICRON
		IC600	0IPRPM3002B	"MST9883C-110 MSTAR 80P,LQFP"
		IC800	0IPRPNP001A	"SM5301BS(ATSC DTV) NPC 28P,H"
		IC901	0IPRPGN014A	GM5221H(HDCP) GENESIS 208P Q
		IC2	0IPMGK2001B	AIC1117A-33CYTR(BS33) AIC SO
		IC300	0IPMGKE039A	"KIA78D09F KEC 3P,DPAK R/TP 9"
		IC4	0IPMGK2001B	AIC1117A-33CYTR(BS33) AIC SO
		IC505	0IPMGSG018D	"LD1086DT18TR SGS-THOMSON 3P,"
		IC6	0IPMGSG018D	"LD1086DT18TR SGS-THOMSON 3P,"
		IC601	0IPMGK2001B	AIC1117A-33CYTR(BS33) AIC SO
		IC604	0IPMGFA061A	"FAN1587AD33X FAIRCHILD 3P,DP"
		IC8	0IMCRFA015A	KA7805R FAIRCHILD 2P D-PAK R
		IC905	0IPMGFA061A	"FAN1587AD33X FAIRCHILD 3P,DP"
		IC906	0IPMGSG018D	"LD1086DT18TR SGS-THOMSON 3P,"
		IC103	0ISS780800J	"KA78M08R 3P,D-PAK TP VOL. RE"
		IC752	0IMCRTI001A	SN74HCT157D TEXAS INSTRUMENT

COIL & CORE & INDUCTOR

		L104	6140TBZ045A	"38.5UH(DIP), 6A, P7.5, DR8.3"
		L105	6140TBZ045A	"38.5UH(DIP), 6A, P7.5, DR8.3"
		L1300	6140VR0008B	SLF12575T-150M3R2 15UH SMD
		L1301	6140VR0008B	SLF12575T-150M3R2 15UH SMD
		L100	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L1002	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L3	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L301	6210TCE001A	HB-1S2012-080JT CERATEC 2012
		L302	6210TCE001A	HB-1S2012-080JT CERATEC 2012
		L304	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L311	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L4	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L401	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L500	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L501	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L502	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L503	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L504	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L505	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L600	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L601	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L602	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L701	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L800	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L850	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L900	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L901	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L902	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L903	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L907	6210TCE001G	HH-1M3216-501 CERATEC 3216MM
		L202	6210TCE001A	HB-1S2012-080JT CERATEC 2012
		L203	6210TCE001A	HB-1S2012-080JT CERATEC 2012
		L204	6210TCE001A	HB-1S2012-080JT CERATEC 2012
		L205	6210TCE001A	HB-1S2012-080JT CERATEC 2012
		L207	6210TCE001A	HB-1S2012-080JT CERATEC 2012
		L208	6210TCE001A	HB-1S2012-080JT CERATEC 2012

DATE: 2004. 07.14.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		L209	6210TCE001A	HB-1S2012-080JT CERATEC 2012
		L210	6210TCE001A	HB-1S2012-080JT CERATEC 2012
		L603	6210TCE001A	HB-1S2012-080JT CERATEC 2012
		L1	0LC1032101A	10UH 10% 3216 R/TC FI-C3216-
		L1001	0LC1020101A	1UH 10% 2012 R/TC FI-B2012-1
		L11	0LC1032101A	10UH 10% 3216 R/TC FI-C3216-
		L13	0LC1032101A	10UH 10% 3216 R/TC FI-C3216-
		L14	0LC1032101A	10UH 10% 3216 R/TC FI-C3216-
		L15	0LC1032101A	10UH 10% 3216 R/TC FI-C3216-
		L17	0LC1032101A	10UH 10% 3216 R/TC FI-C3216-
		L2	0LC1032101A	10UH 10% 3216 R/TC FI-C3216-
		L402	0LC1532101A	15UH 10% 3216 R/TC FI-C3216-
		L403	0LC1532101A	15UH 10% 3216 R/TC FI-C3216-
		L7	0LC1032101A	10UH 10% 3216 R/TC FI-C3216-
		L10	0LC1032101A	10UH 10% 3216 R/TC FI-C3216-
		L12	0LC1032101A	10UH 10% 3216 R/TC FI-C3216-
		L16	0LC1032101A	10UH 10% 3216 R/TC FI-C3216-
		L200	0LC1020101A	1UH 10% 2012 R/TC FI-B2012-1
		L201	0LC1020101A	1UH 10% 2012 R/TC FI-B2012-1
		L306	0LC1532101A	15UH 10% 3216 R/TC FI-C3216-
		L307	0LC1532101A	15UH 10% 3216 R/TC FI-C3216-
		L308	0LC1532101A	15UH 10% 3216 R/TC FI-C3216-
		L309	0LC1532101A	15UH 10% 3216 R/TC FI-C3216-
		L310	0LC1532101A	15UH 10% 3216 R/TC FI-C3216-
		L8	0LC1032101A	10UH 10% 3216 R/TC FI-C3216-
		L9	0LC1032101A	10UH 10% 3216 R/TC FI-C3216-

FET & TRANSISTOR

		IC1101	0TF492509AA	SI4925DY TP TEMIC 30V 6.1A
		IC902	0TF492509AA	SI4925DY TP TEMIC 30V 6.1A
		Q1000	0TR388109AA	KTC3881 CHIP TP KEC - -
		Q1101	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q1102	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q212	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q300	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q302	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q303	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q304	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q318	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q701	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q100	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q101	0TR150400BA	CHIP 2SA1504S(ASY) BK KEC -
		Q12	0TR150400BA	CHIP 2SA1504S(ASY) BK KEC -
		Q13	0TR150400BA	CHIP 2SA1504S(ASY) BK KEC -
		Q14	0TR150400BA	CHIP 2SA1504S(ASY) BK KEC -
		Q15	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q16	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q17	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q301	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q305	0TR150400BA	CHIP 2SA1504S(ASY) BK KEC -
		Q306	0TR150400BA	CHIP 2SA1504S(ASY) BK KEC -
		Q308	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q310	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q313	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q315	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q316	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q317	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q500	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q901	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -

DATE: 2004. 07.14.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
RESISTORS				
		R10	0RH3301D622	3.3K 1/10W 5 D.R/TP
		R1001	0RH0562D622	56 1/10W 5 D.R/TP
		R1003	0RH8200D622	820 1/10W 5 D.R/TP
		R1004	0RH3000D622	300 1/10W 5 D.R/TP
		R1005	0RH0682D622	68 1/10W 5 D.R/TP
		R1010	0RH7501D622	7.5K 1/10W 5 D.R/TP
		R1012	0RH7502D622	75K 1/10W 5 D.R/TP
		R1014	0RH1000D622	100 1/10W 5 D.R/TP
		R104	0RH1000D622	100 1/10W 5 D.R/TP
		R106	0RH1500D622	150 1/10W 5 D.R/TP
		R107	0RH1503D622	150K 1/10W 5 D.R/TP
		R11	0RH3301D622	3.3K 1/10W 5 D.R/TP
		R1100	0RH1000D622	100 1/10W 5 D.R/TP
		R1101	0RH1000D622	100 1/10W 5 D.R/TP
		R1102	0RH1000D622	100 1/10W 5 D.R/TP
		R1106	0RH1202D622	12K 1/10W 5 D.R/TP
		R1107	0RH1502D622	15K 1/10W 5 D.R/TP
		R118	0RH1000D622	100 1/10W 5 D.R/TP
		R126	0RH1502D622	15K 1/10W 5 D.R/TP
		R132	0RH1003D622	100K 1/10W 5 D.R/TP
		R133	0RH1003D622	100K 1/10W 5 D.R/TP
		R134	0RH1003D622	100K 1/10W 5 D.R/TP
		R135	0RH1003D622	100K 1/10W 5 D.R/TP
		R140	0RH0392D622	39 1/10W 5 D.R/TP
		R141	0RH0392D622	39 1/10W 5 D.R/TP
		R142	0RH0392D622	39 1/10W 5 D.R/TP
		R143	0RH0392D622	39 1/10W 5 D.R/TP
		R144	0RH0392D622	39 1/10W 5 D.R/TP
		R145	0RH0392D622	39 1/10W 5 D.R/TP
		R146	0RH0392D622	39 1/10W 5 D.R/TP
		R147	0RH0392D622	39 1/10W 5 D.R/TP
		R154	0RH0822D622	82 1/10W 5 D.R/TP
		R156	0RH0822D622	82 1/10W 5 D.R/TP
		R158	0RH0822D622	82 1/10W 5 D.R/TP
		R162	0RH2701D622	2.7K 1/10W 5 D.R/TP
		R201	0RH4703D622	470K 1/10W 5 D.R/TP
		R202	0RH3901D622	3.9K 1/10W 5 D.R/TP
		R203	0RH3901D622	3.9K 1/10W 5 D.R/TP
		R204	0RH4703D622	470K 1/10W 5 D.R/TP
		R24	0RH1000D622	100 1/10W 5 D.R/TP
		R25	0RH1000D622	100 1/10W 5 D.R/TP
		R266	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R267	0RH4702D622	47K 1/10W 5 D.R/TP
		R268	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R312	0RH4700D622	470 1/10W 5 D.R/TP
		R313	0RH1500D622	150 1/10W 5 D.R/TP
		R314	0RH4700D622	470 1/10W 5 D.R/TP
		R315	0RH1500D622	150 1/10W 5 D.R/TP
		R322	0RH1500D622	150 1/10W 5 D.R/TP
		R394	0RH6800D622	680 OHM 1 / 10 W 5% D R/TP
		R395	0RH6800D622	680 OHM 1 / 10 W 5% D R/TP
		R44	0RH1000D622	100 1/10W 5 D.R/TP
		R45	0RH1000D622	100 1/10W 5 D.R/TP
		R502	0RH3301D622	3.3K 1/10W 5 D.R/TP
		R520	0RH1800D622	180 1/10W 5 D.R/TP
		R527	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R607	0RH1000D622	100 1/10W 5 D.R/TP
		R610	0RH2701D622	2.7K 1/10W 5 D.R/TP
		R703	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R705	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R712	0RH0752D622	75 1/10W 5 D.R/TP


DATE: 2004. 07.14.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R713	0RH0752D622	75 1/10W 5 D.R/TP
		R715	0RH1202D622	12K 1/10W 5 D.R/TP
		R716	0RH0752D622	75 1/10W 5 D.R/TP
		R719	0RH1502D622	15K 1/10W 5 D.R/TP
		R725	0RH1000D622	100 1/10W 5 D.R/TP
		R729	0RH1000D622	100 1/10W 5 D.R/TP
		R730	0RH1000D622	100 1/10W 5 D.R/TP
		R737	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R738	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R755	0RH0102D622	10 1/10W 5 D.R/TP
		R756	0RH0102D622	10 1/10W 5 D.R/TP
		R802	0RH8200D622	820 1/10W 5 D.R/TP
		R805	0RH0752D622	75 1/10W 5 D.R/TP
		R806	0RH4700D622	470 1/10W 5 D.R/TP
		R809	0RH0102D622	10 1/10W 5 D.R/TP
		R83	0RH1000D622	100 1/10W 5 D.R/TP
		R85	0RH1000D622	100 1/10W 5 D.R/TP
		R850	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R851	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R87	0RH1000D622	100 1/10W 5 D.R/TP
		R89	0RH1000D622	100 1/10W 5 D.R/TP
		R930	0RH3301D622	3.3K 1/10W 5 D.R/TP
		R931	0RH3301D622	3.3K 1/10W 5 D.R/TP
		R941	0RH1000D622	100 1/10W 5 D.R/TP
		R960	0RH1000D622	100 1/10W 5 D.R/TP
		R969	0RH1202D622	12K 1/10W 5 D.R/TP
		R971	0RH1502D622	15K 1/10W 5 D.R/TP
		R974	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R977	0RH4701D622	4.7K 1/10W 5 D.R/TP
		L1003	0RH2200D622	220 1/10W 5 D.R/TP
		RA600	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100
		RA601	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100
		RA602	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100
		RA603	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100
		RA604	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100
		RA605	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100
		L303	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R1002	0RH1501D622	1.5K OHM 1 / 10 W 2012 5.00% D
		R1011	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R1013	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R1015	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R1026	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R1105	0RH1001D622	1K OHM 1 / 10 W 2012 5.00% D
		R1108	0RH1001D622	1K OHM 1 / 10 W 2012 5.00% D
		R128	0RH1002D622	10K OHM 1 / 10 W 2012 5.00% D
		R129	0RH1002D622	10K OHM 1 / 10 W 2012 5.00% D
		R1290	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R1301	0RH1002D622	10K OHM 1 / 10 W 2012 5.00% D
		R1304	0RH1002D622	10K OHM 1 / 10 W 2012 5.00% D
		R1350	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R22	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R264	0RH1001D622	1K OHM 1 / 10 W 2012 5.00% D
		R265	0RH1001D622	1K OHM 1 / 10 W 2012 5.00% D
		R271	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R273	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R300	0RH1002D622	10K OHM 1 / 10 W 2012 5.00% D
		R301	0RH1002D622	10K OHM 1 / 10 W 2012 5.00% D
		R302	0RH1002D622	10K OHM 1 / 10 W 2012 5.00% D
		R304	0RH1002D622	10K OHM 1 / 10 W 2012 5.00% D
		R305	0RH1002D622	10K OHM 1 / 10 W 2012 5.00% D
		R306	0RH1002D622	10K OHM 1 / 10 W 2012 5.00% D
		R307	0RH1002D622	10K OHM 1 / 10 W 2012 5.00% D


DATE: 2004. 07.14.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R308	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R309	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R338	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R339	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R342	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R343	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R348	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R349	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R352	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R353	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R354	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R355	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R363	0RH1001D622	1K OHM 1 / 10 W 2012 5.00% D
		R367	0RH1001D622	1K OHM 1 / 10 W 2012 5.00% D
		R373	0RH1001D622	1K OHM 1 / 10 W 2012 5.00% D
		R377	0RH1001D622	1K OHM 1 / 10 W 2012 5.00% D
		R379	0RH1001D622	1K OHM 1 / 10 W 2012 5.00% D
		R381	0RH1001D622	1K OHM 1 / 10 W 2012 5.00% D
		R383	0RH1001D622	1K OHM 1 / 10 W 2012 5.00% D
		R46	0RH1001D622	1K OHM 1 / 10 W 2012 5.00% D
		R505	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R506	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R516	0RH0222D622	22 OHM 1 / 10 W 2012 5.00% D
		R517	0RH0222D622	22 OHM 1 / 10 W 2012 5.00% D
		R519	0RH0222D622	22 OHM 1 / 10 W 2012 5.00% D
		R530	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R532	0RH0222D622	22 OHM 1 / 10 W 2012 5.00% D
		R700	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R726	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R732	0RH1001D622	1K OHM 1 / 10 W 2012 5.00% D
		R752	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R753	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R760	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R761	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R803	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R854	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R903	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R963	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R964	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R978	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R999	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R100	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R101	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R102	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R103	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R105	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R108	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R109	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R110	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R1109	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R111	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R112	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R113	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R114	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R115	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R116	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R117	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R120	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R121	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R122	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R123	0RJ2202D677	22K OHM 1/10 W 5% 1608 R/TP
		R124	0RJ1500D677	150 OHM 1/10 W 5% 1608 R/TP

DATE: 2004. 07.14.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R125	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R127	0RJ3301D677	3.3K OHM 1/10 W 5% 1608 R/TP
		R130	0RJ6801D477	6.8K OHM 1/10 W 1% 1608 R/TP
		R1300	0RJ6801D477	6.8K OHM 1/10 W 1% 1608 R/TP
		R1302	0RJ2202D477	22K OHM 1/10 W 1% 1608 R/TP
		R1303	0RJ6801D477	6.8K OHM 1/10 W 1% 1608 R/TP
		R1305	0RJ2202D477	22K OHM 1/10 W 1% 1608 R/TP
		R131	0RJ6801D477	6.8K OHM 1/10 W 1% 1608 R/TP
		R136	0RJ8202D677	82K OHM 1/10 W 5% 1608 R/TP
		R137	0RJ8202D677	82K OHM 1/10 W 5% 1608 R/TP
		R138	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R139	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R15	0RJ4700D677	470 OHM 1/10 W 5% 1608 R/TP
		R152	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R153	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R155	0RJ2700D677	270 OHM 1/10 W 5% 1608 R/TP
		R157	0RJ2700D677	270 OHM 1/10 W 5% 1608 R/TP
		R159	0RJ2700D677	270 OHM 1/10 W 5% 1608 R/TP
		R16	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R160	0RJ1500D677	150 OHM 1/10 W 5% 1608 R/TP
		R161	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R163	0RJ1500D677	150 OHM 1/10 W 5% 1608 R/TP
		R164	0RJ1500D677	150 OHM 1/10 W 5% 1608 R/TP
		R17	0RJ2202D677	22K OHM 1/10 W 5% 1608 R/TP
		R173	0RJ3301D677	3.3K OHM 1/10 W 5% 1608 R/TP
		R175	0RJ3301D677	3.3K OHM 1/10 W 5% 1608 R/TP
		R18	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R205	0RJ0682D677	68 OHM 1/10 W 5% 1608 R/TP
		R207	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R209	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R210	0RJ3902D677	39K OHM 1/10 W 5% 1608 R/TP
		R211	0RJ5102D677	51K OHM 1/10 W 5% 1608 R/TP
		R213	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R214	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R218	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R220	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R237	0RJ0682D677	68 OHM 1/10 W 5% 1608 R/TP
		R238	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R239	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R240	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R241	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R244	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R245	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R246	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R247	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R248	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R249	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R250	0RJ3902D677	39K OHM 1/10 W 5% 1608 R/TP
		R251	0RJ5102D677	51K OHM 1/10 W 5% 1608 R/TP
		R253	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R254	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R256	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R257	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R303	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R317	0RJ2700D677	270 OHM 1/10 W 5% 1608 R/TP
		R319	0RJ2700D677	270 OHM 1/10 W 5% 1608 R/TP
		R321	0RJ2700D677	270 OHM 1/10 W 5% 1608 R/TP
		R323	0RJ1500D677	150 OHM 1/10 W 5% 1608 R/TP
		R326	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R329	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R34	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R35	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP

DATE: 2004. 07.14.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R945	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R946	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R947	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R948	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R949	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R95	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R950	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R952	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R953	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R96	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R965	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R966	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R967	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R968	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R970	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R972	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R975	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R98	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R99	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
OTHERS				
		Z1000	6200QL3002F	"X6966M EPCOS ST SIP5K, 6200Q"
		P700	6612BBBH6A	440062-1 AMP DVI INTERACED R
		JA100	6612F00059C	KJA-SHS360LB KSD SHIELD 3.6P
		SC1	381-091C	UPJ-R1-019 UGCOM 21PIN W/SHI
		SC2	381-091C	UPJ-R1-019 UGCOM 21PIN W/SHI
		X11	6202VDT002E	SX-1SMD SUNNY RADIAL 2025000
		X500	6202VDT002J	SX-1 SUNNY 13.500000MHZ +/-
		X900	6202VDT002B	SX-1 SUNNY SC14.3MHZ +/- 30
		IC900	6620F00017A	CCSD-32T-SM WOOYOUNG 32P PLC
		TU1000	6700VS0003A	TAEW-G051D LG INOTEK MULTI -RT-26LZ30
		TU1000	6700VS0003C	TAEW-G051P LG INOTEK MULTI -RM-26LZ30
CONTROL BOARD				
		L1700	0LA0102K119	10UH K 2.3*3.4 TP
		R1700	0RN6800F409	680 1/6W 1% TA52
		R1701	0RN5100F409	510 1/6W 1% TA52
		R1702	0RN3900F409	390 1/6W 1% TA52
		R1703	0RN3000F409	300 1/6W 1% TA52
		R1704	0RD2400Q609	240 OHM 1/4 W (3.4) 5% TA52
		R1705	0RN2000F409	200 1/6W 1% TA52
		R1706	0RN1800F409	180 OHM 1/6 W 1.00% TA52
		R1707	0RN2001F409	2K OHM 1/6 W 1.00% TA52
		SW1700	140-313A	TACT 2LEAD 100G(TA) LG C&D N
		SW1701	140-313A	TACT 2LEAD 100G(TA) LG C&D N
		SW1702	140-313A	TACT 2LEAD 100G(TA) LG C&D N
		SW1703	140-313A	TACT 2LEAD 100G(TA) LG C&D N
		SW1704	140-313A	TACT 2LEAD 100G(TA) LG C&D N
		SW1705	140-313A	TACT 2LEAD 100G(TA) LG C&D N
		SW1706	140-313A	TACT 2LEAD 100G(TA) LG C&D N
		SW1707	140-313A	TACT 2LEAD 100G(TA) LG C&D N
		C1502	0CE3363F618	33UF SRE 16V M FL TP5
		C1507	0CE3363F618	33UF SRE 16V M FL TP5
		C1509	0CE3363F618	33UF SRE 16V M FL TP5
		L1500	0LA0102K119	10UH K 2.3*3.4 TP
		L1501	0LA0102K119	10UH K 2.3*3.4 TP
		L1502	0LA0102K119	10UH K 2.3*3.4 TP
		L1503	0LA0102K119	10UH K 2.3*3.4 TP
		LED1501	6301T00001A	YANGWOO LED ASSEMBLY PAL -RT-26LZ30
		LED1501	6301V00002A	NON YANGWOO DN-42LZ30 -RM-26LZ30

DATE: 2004. 07.14.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C1500	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C1501	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C1503	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C1504	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C1505	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C1506	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C1508	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C1510	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		IC1501	0INE163110A	UPD16311GC-AB6 FIP DRIV 52PQ
		IC1502	0IKE657830B	KID65783AF 20PIN SOP TRAY TR
		Q1500	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q1501	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q1502	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q1503	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q1504	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q1505	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q1506	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q1507	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q1508	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q1509	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		R1500	0RH1500D622	150 1/10W 5 D.R/TP
		R1501	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R1502	0RH1500D622	150 1/10W 5 D.R/TP
		R1503	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R1504	0RH1500D622	150 1/10W 5 D.R/TP
		R1505	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R1506	0RH3302D622	33K 1/10W 5 D.R/TP
		R1507	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R1508	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R1509	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R1510	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R1511	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R1512	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R1513	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R1514	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R1515	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R1516	0RH1000D622	100 1/10W 5 D.R/TP
		R1517	0RH1000D622	100 1/10W 5 D.R/TP
		R1518	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R1519	0RH1000D622	100 1/10W 5 D.R/TP
		R1520	0RH1000D622	100 1/10W 5 D.R/TP
		R1521	0RH1000D622	100 1/10W 5 D.R/TP
		R1522	0RH1000D622	100 1/10W 5 D.R/TP
		R1523	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R1524	0RH4702D622	47K 1/10W 5 D.R/TP
		R1525	0RH4701D622	4.7K 1/10W 5 D.R/TP
		R1526	0RH1000D622	100 1/10W 5 D.R/TP
		R1527	0RH2200D622	220 1/10W 5 D.R/TP
		R1528	0RH1000D622	100 1/10W 5 D.R/TP
		R1530	0RH7500D622	750 OHM 1 / 10 W 5% D R/TP
		R1531	0RH0392D622	39 1/10W 5 D.R/TP
		R1532	0RH0392D622	39 1/10W 5 D.R/TP
		R1533	0RH0392D622	39 1/10W 5 D.R/TP
		R1534	0RH0392D622	39 1/10W 5 D.R/TP
		R1535	0RH0392D622	39 1/10W 5 D.R/TP
		R1536	0RH0392D622	39 1/10W 5 D.R/TP
		R1537	0RH0392D622	39 1/10W 5 D.R/TP
		R1538	0RH0392D622	39 1/10W 5 D.R/TP
		R1539	0RH0392D622	39 1/10W 5 D.R/TP
		R1540	0RH0392D622	39 1/10W 5 D.R/TP
		R1541	0RH0392D622	39 1/10W 5 D.R/TP
		R1542	0RH0392D622	39 1/10W 5 D.R/TP

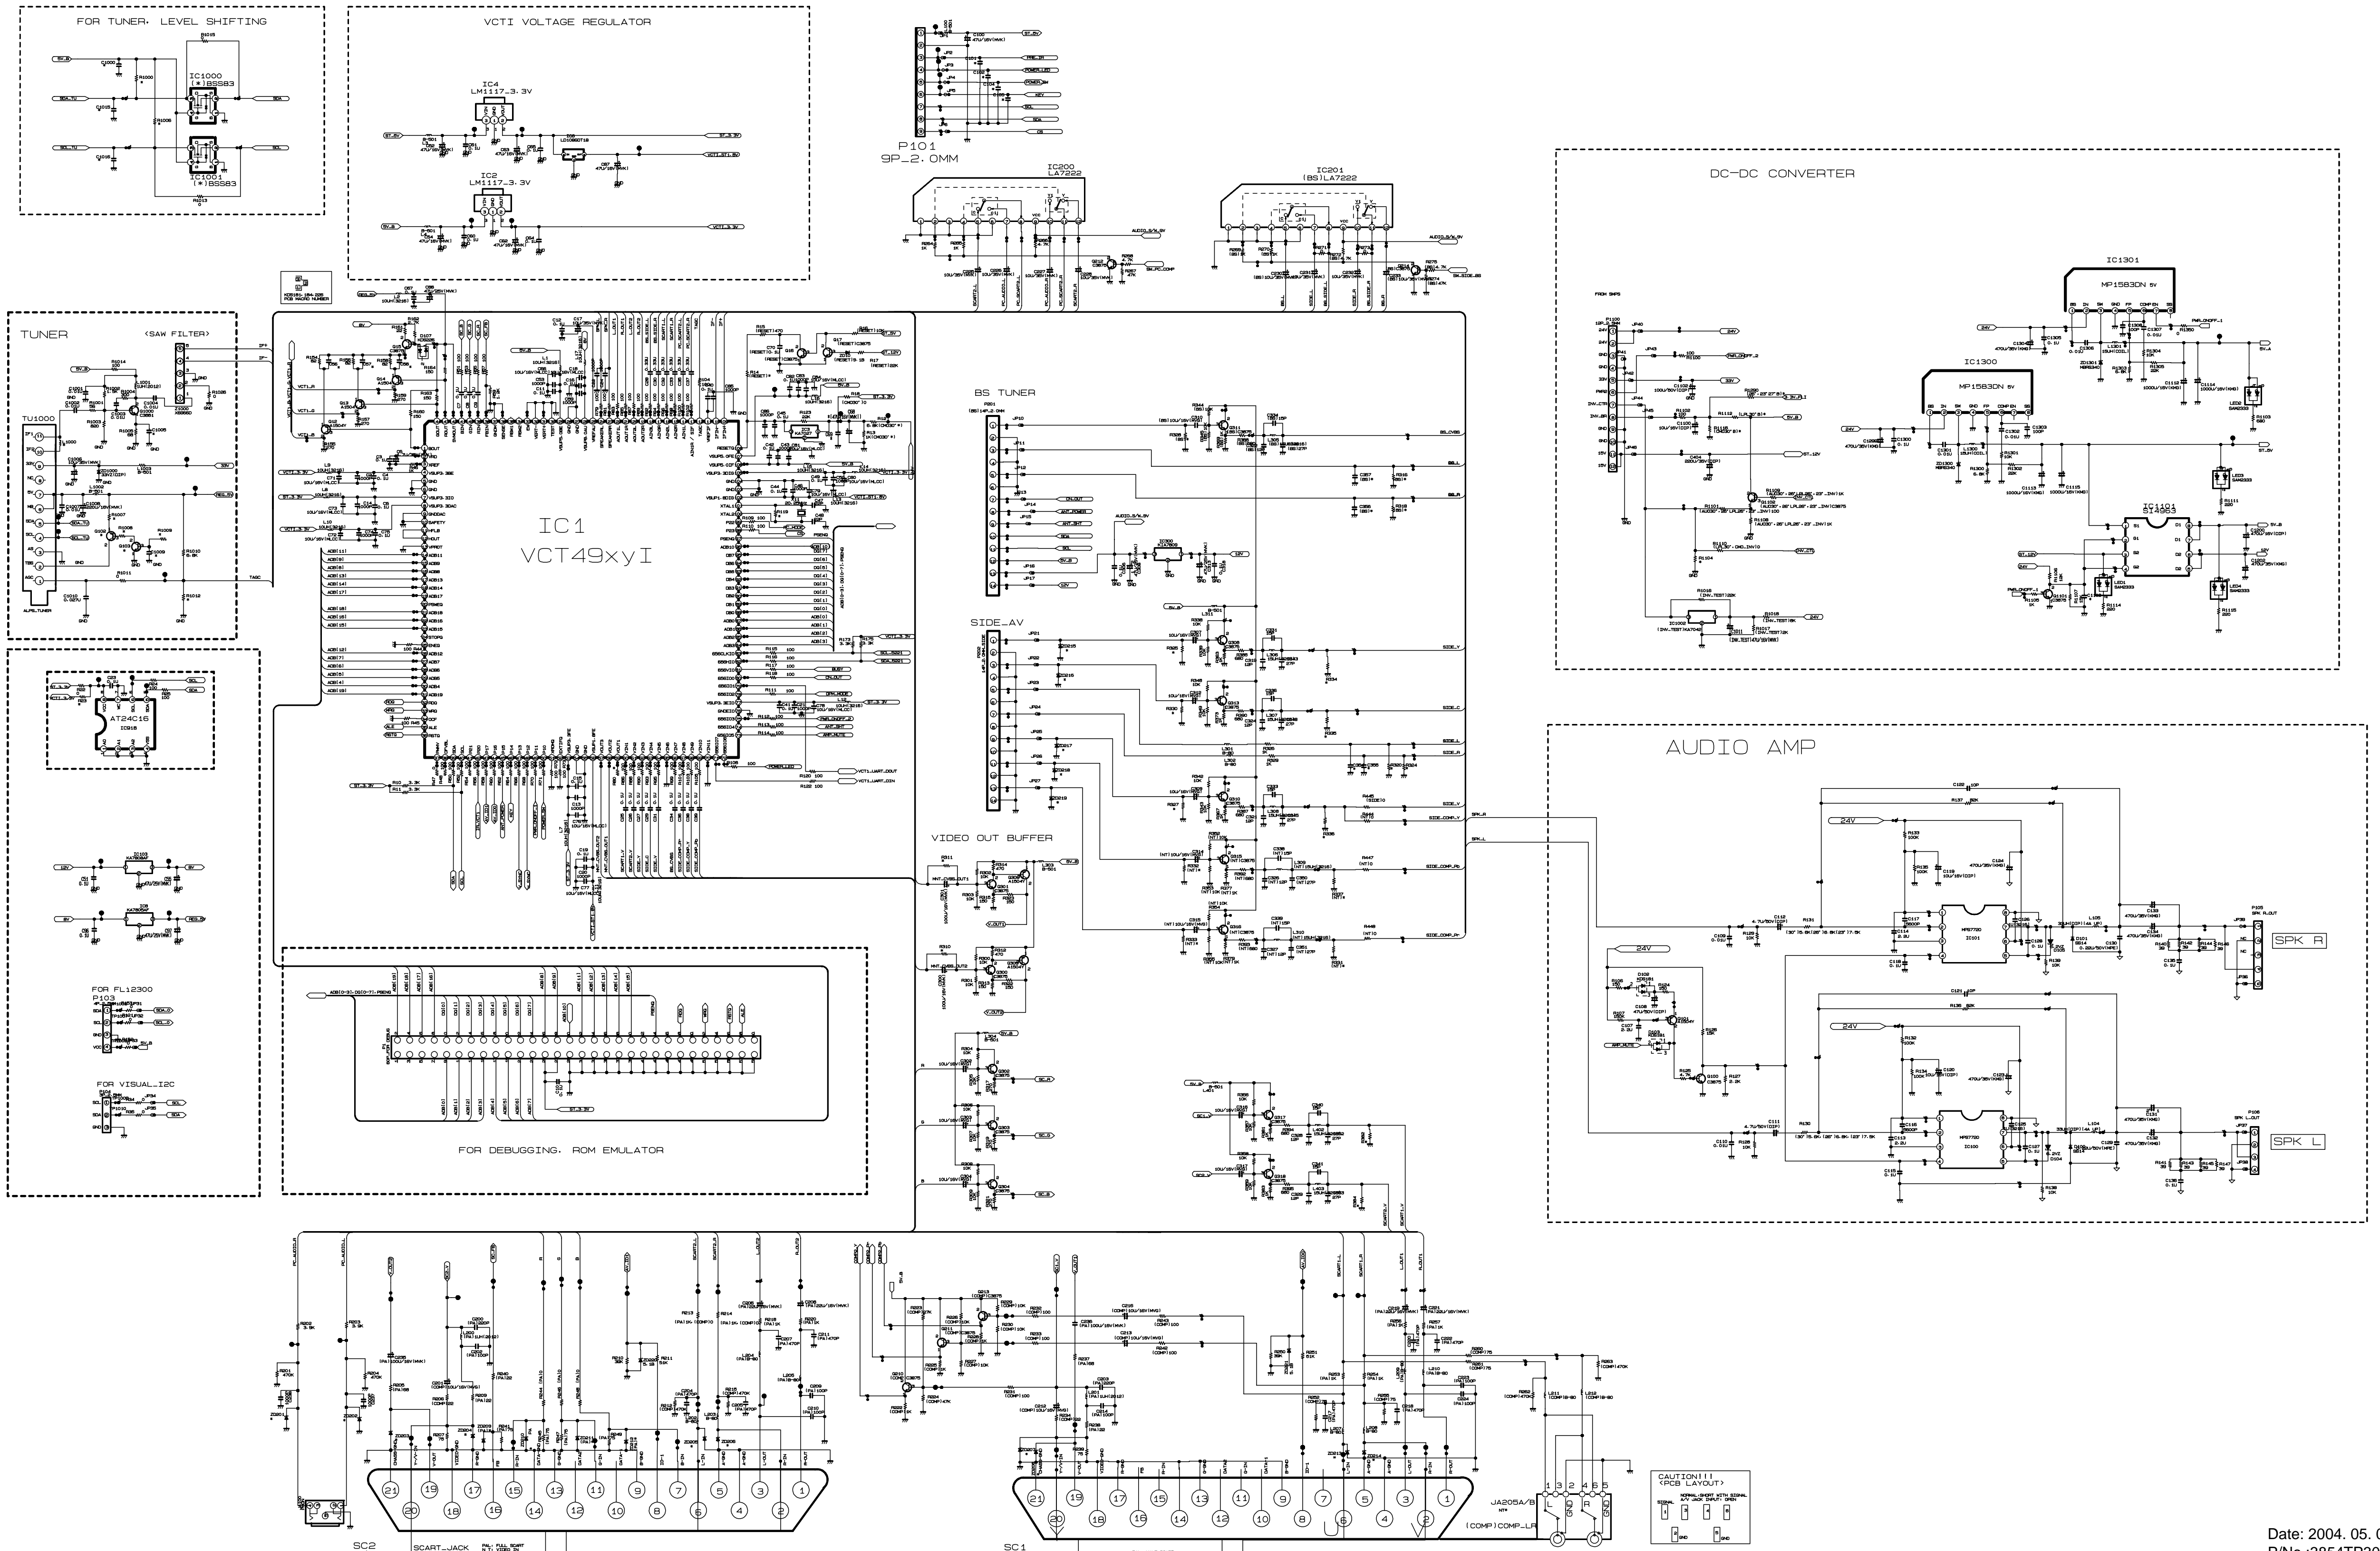

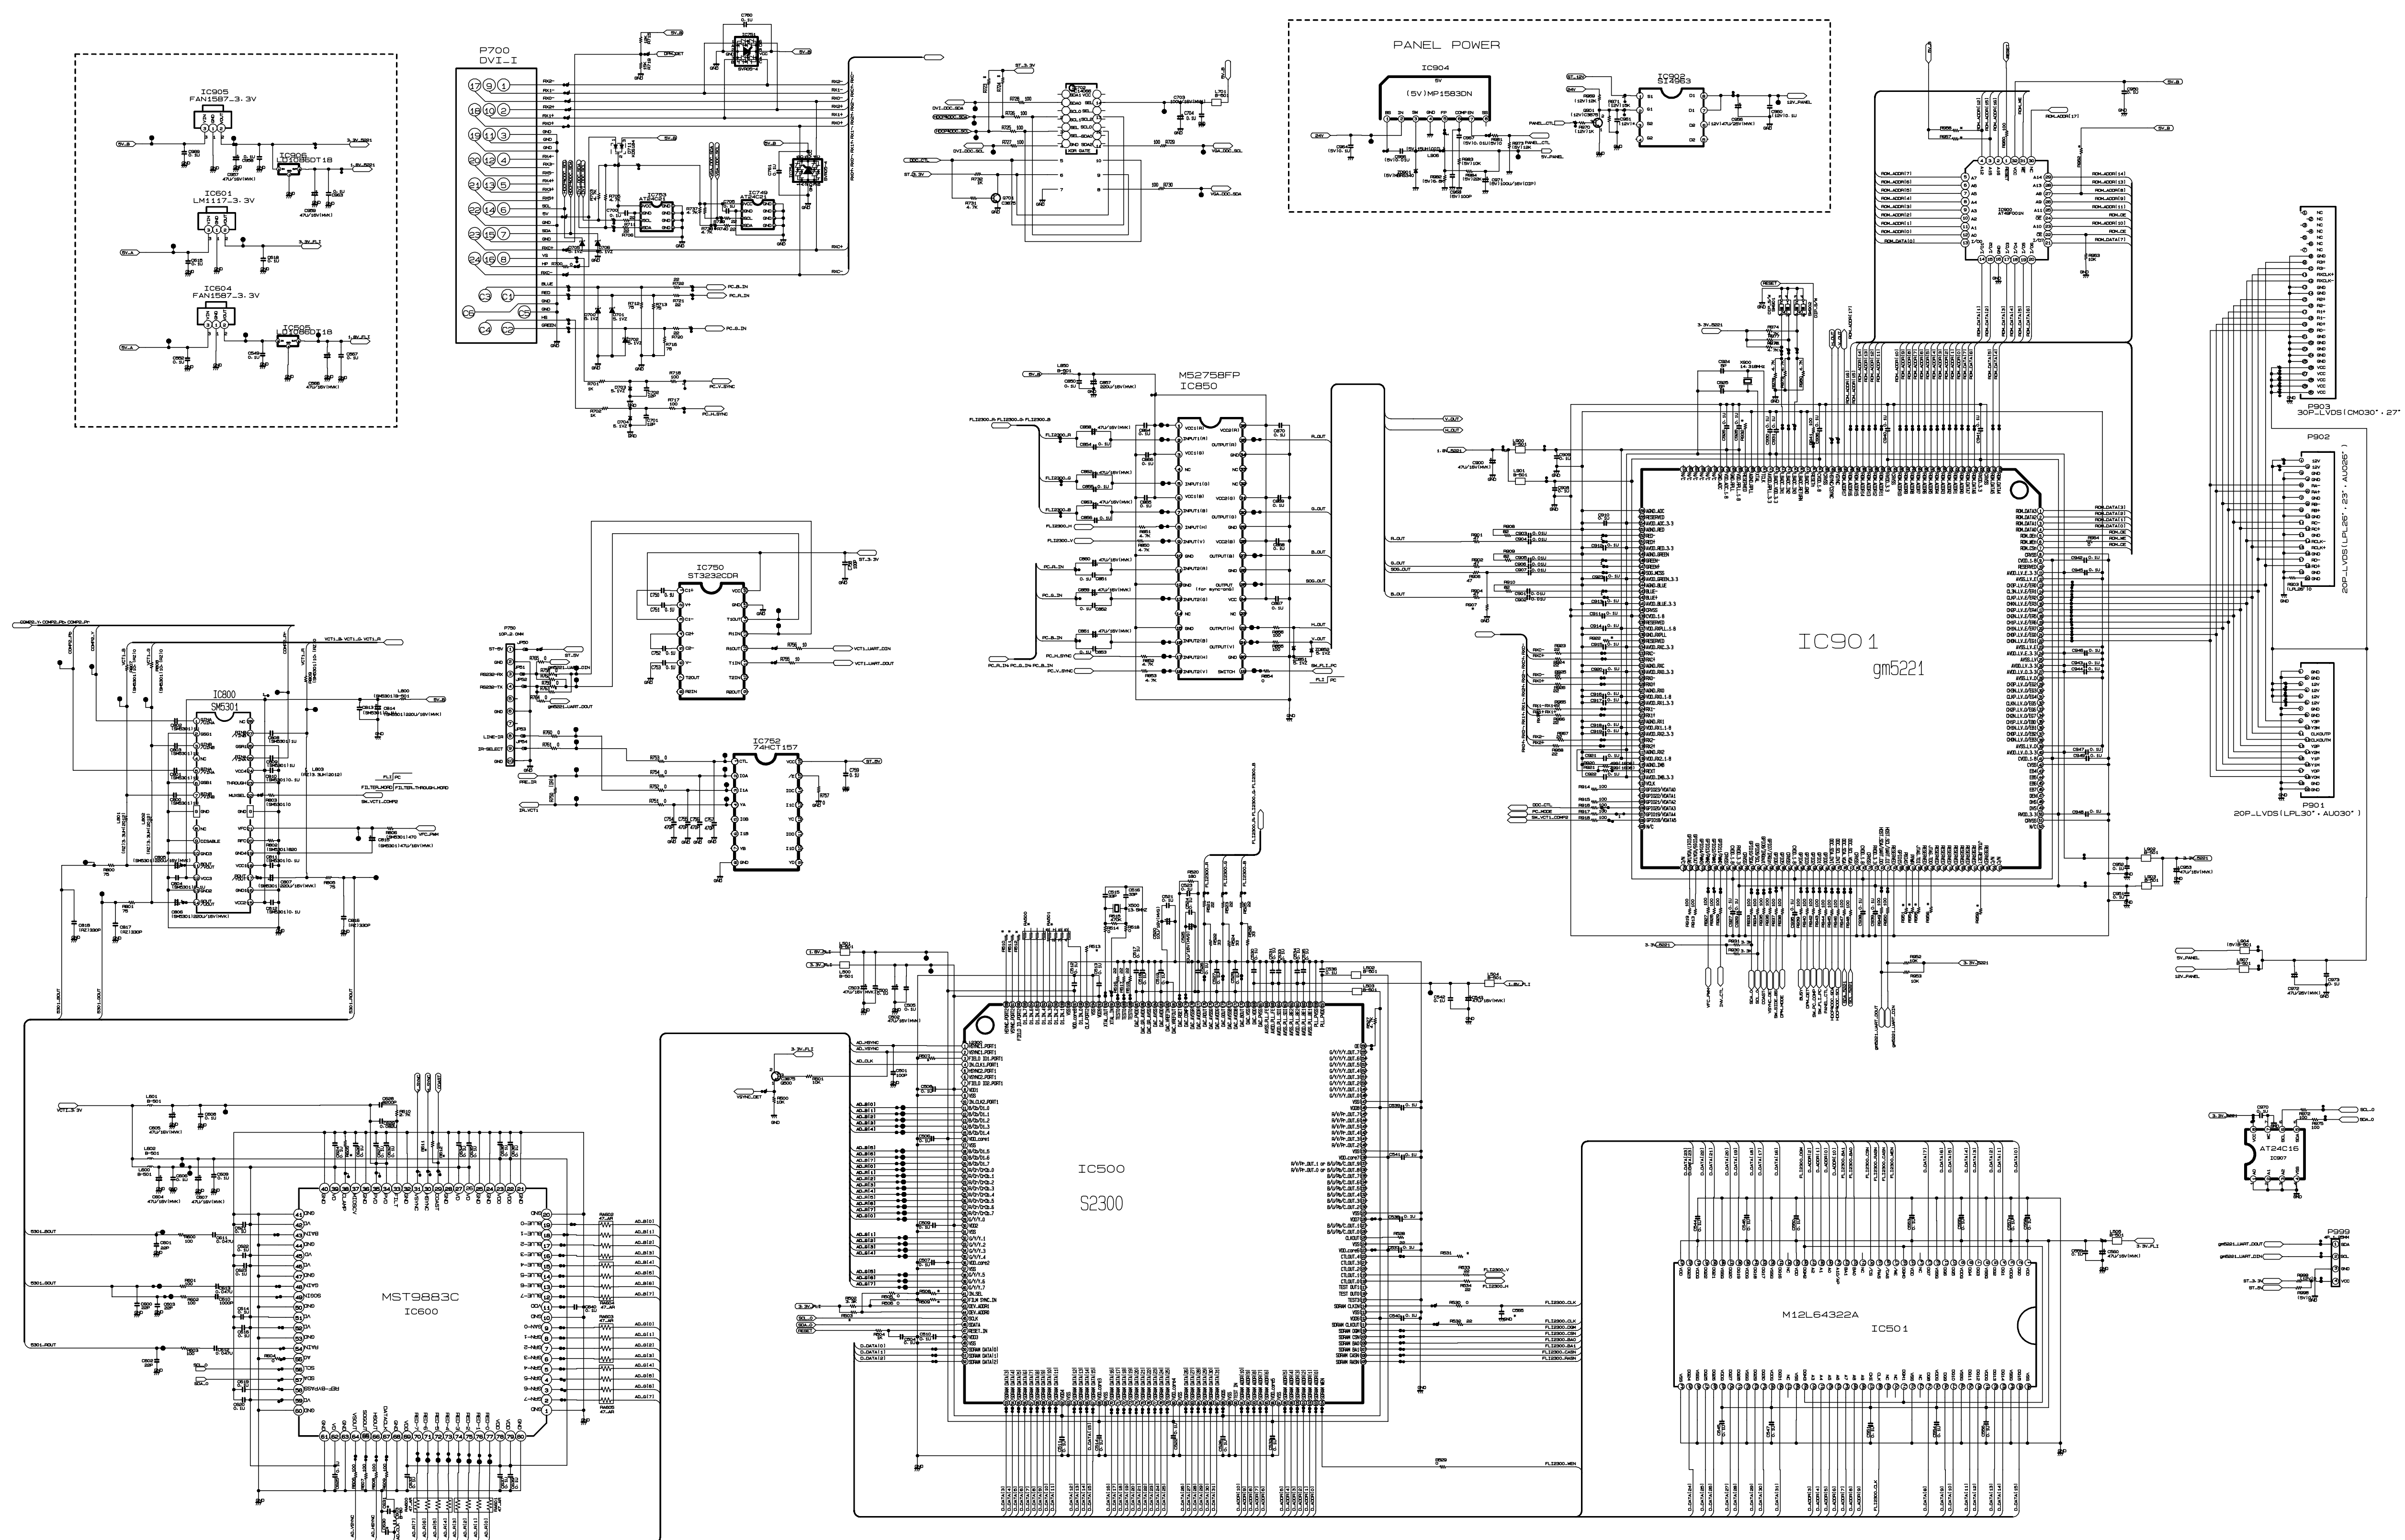



P/NO : 3828TSL104A

Jul., 2004
Printed in Korea